

 Φ250-5

ErP2015
EXCEEDS THE NORM



Φ 250-5 系列轴流风机
Φ 250-5 Series Axial Fan

材 质：转子铸铝
Material: Aluminum casting
保护等级: IP44
Protection Class: IP44
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing



2-Pole



4-Pole

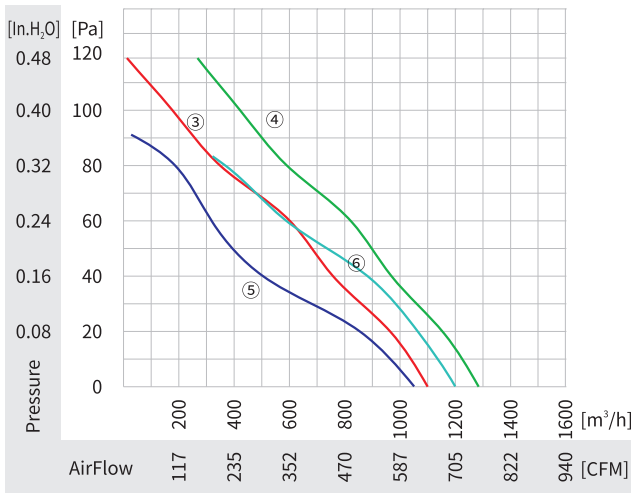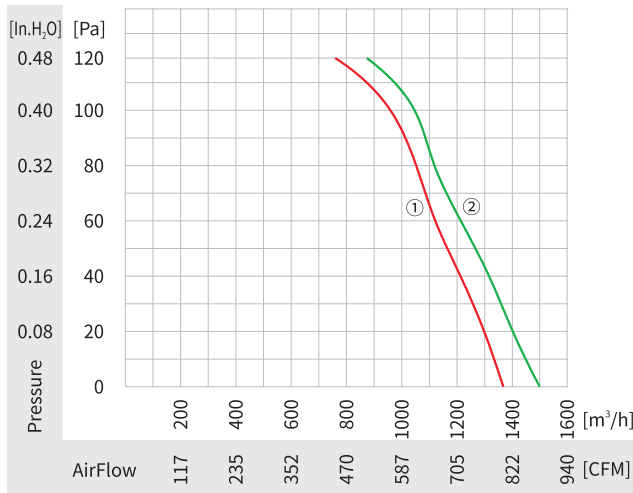



 B型网罩	 C型网罩	 E型导风管	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.E	Model No.G	Model No.F0	Model No.F1
YWF.A2S-250S-5BIA00	YWF.A2S-250S-5CIA00	YWF.A2S-250S-5EIA00	YWF.A2S-250S-5GIA00	YWF.A2S-250S-5FIA00	/
YWF.A2T-250S-5BIA00	YWF.A2T-250S-5CIA00	YWF.A2T-250S-5EIA00	YWF.A2T-250S-5GIA00	YWF.A2T-250S-5FIA00	/
YWF.A4S-250S-5BIA00	YWF.A4S-250S-5CIA00	YWF.A4S-250S-5EIA00	YWF.A4S-250S-5GIA00	YWF.A4S-250S-5FIA00	/
YWF.A4T-250S-5BIA00	YWF.A4T-250S-5CIA00	YWF.A4T-250S-5EIA00	YWF.A4T-250S-5GIA00	YWF.A4T-250S-5FIA00	/
YWF.A2S-250S-5BIA05	YWF.A2S-250S-5CIA05	YWF.A2S-250S-5EIA05	YWF.A2S-250S-5GIA05	YWF.A2S-250S-5FIA05	/
YWF.A4S-250S-5BIA05	YWF.A4S-250S-5CIA05	YWF.A4S-250S-5EIA05	YWF.A4S-250S-5GIA05	YWF.A4S-250S-5FIA05	/

 Φ250-5

Model No.D

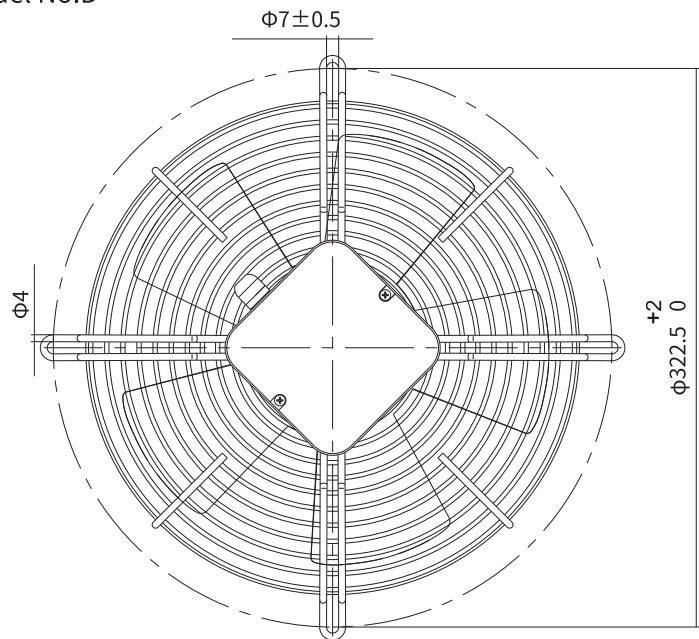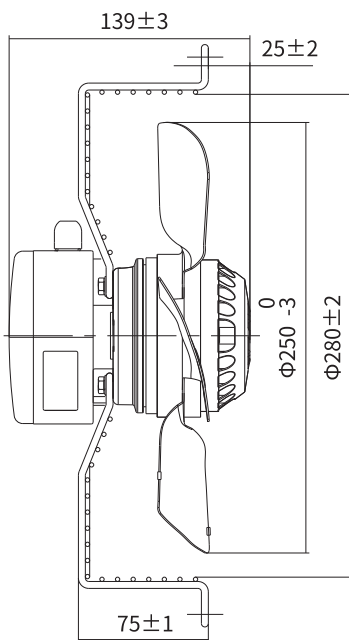

Model No.F0

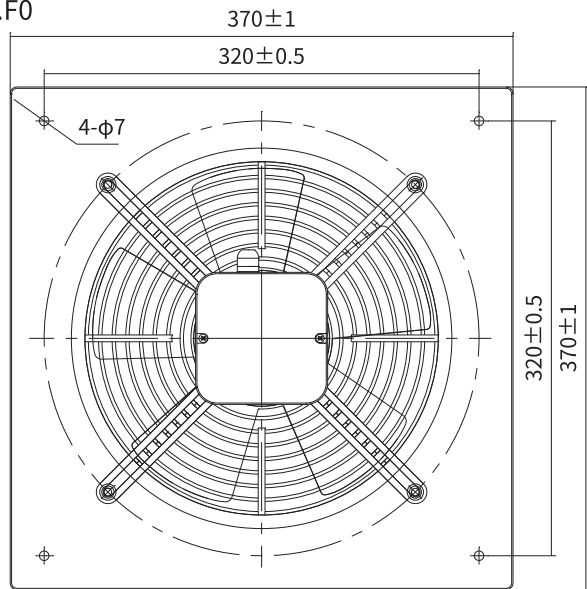
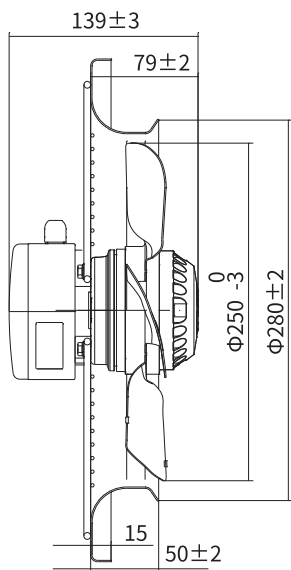


 D型网罩	电压 Voltage	频率 Frequency	电 流 Current	输入功率 Input Power	转速 Speed	电 容 Capacitor	风量 Air Flow(OPa)	噪 音 Noise	曲 线 Curve No.	运行温度 Operating Temperature	认 证 Approvals
Model No.D	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A2S-250S-5DIA00	220/230	50	0.43	95	2600	3	1360/800	60	①	-30/+60	CCC,CE,RoHS
		60	0.59	130	2750		1500/882	62	②		CCC,CE,RoHS,UL
YWF.A2T-250S-5DIA00	380/400	50	0.15	80	2450	/	1300/764	59	①	-30/+60	CCC,CE,RoHS
		60	0.18	110	2600		1400/823	60	②		CCC,CE,RoHS,UL
YWF.A4S-250S-5DIA00	220/230	50	0.25	55	1400	2	1100/647	49	③	-30/+60	CCC,CE,RoHS
		60	0.29	65	1620		1280/752	53	④		CCC,CE,RoHS,UL
YWF.A4T-250S-5DIA00	380/400	50	0.16	60	1400	/	1100/647	49	③	-30/+60	CCC,CE,RoHS
		60	0.15	60	1600		1280/752	53	④		CCC,CE,RoHS,UL
YWF.A2S-250S-5DIA05	115/120	50	0.93	100	2480	10	1330/782	60	①	-30/+60	RoHS
		60	1.00	120	2650		1500/882	62	②		RoHS,UL
YWF.A4S-250S-5DIA05	115/120	50	0.46	50	1400	5	1040/611	49	⑤	-30/+60	RoHS
		60	0.48	55	1600		1200/705	54	⑥		RoHS,UL





Φ250-5

Model No.B

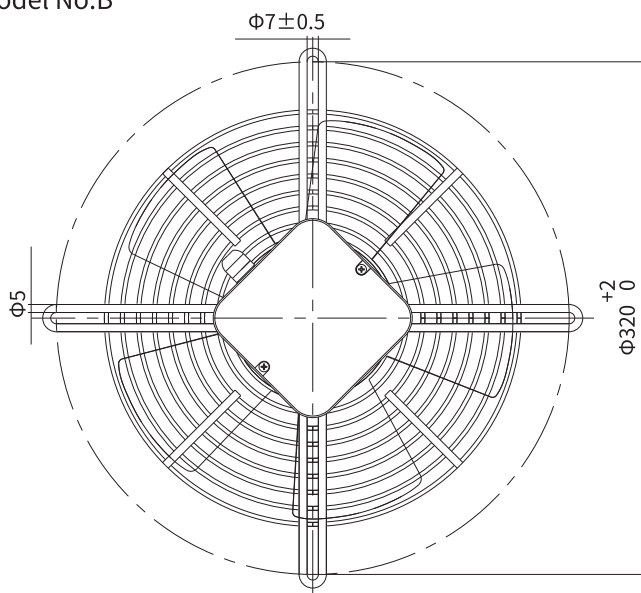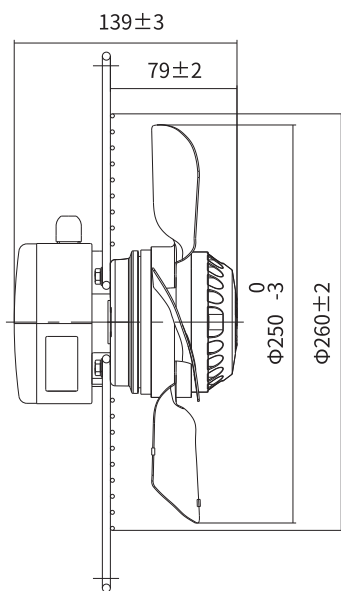

Model No.C

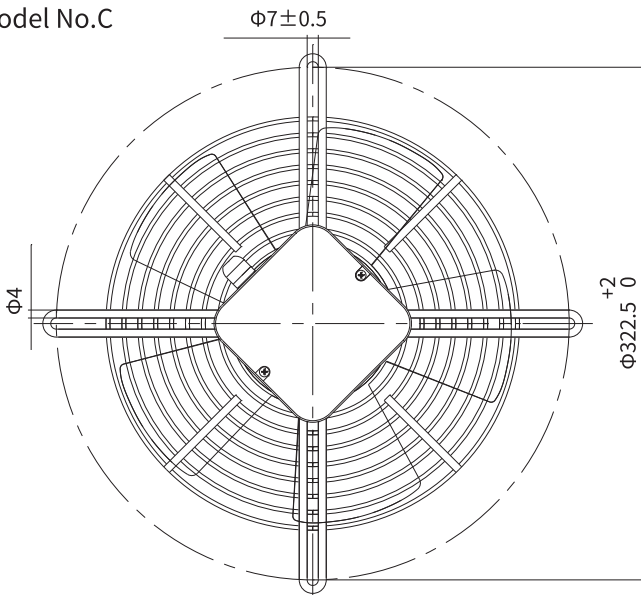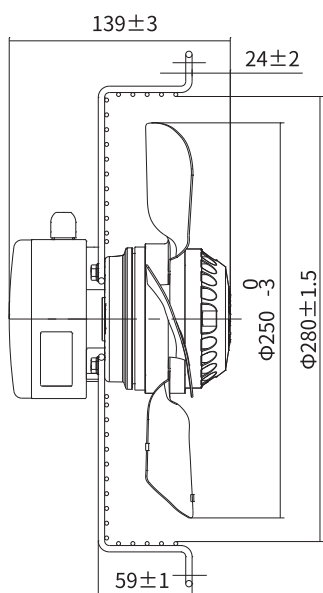

Model No.E

