

 Φ200-5

ErP2015
EXCEEDS THE NORM



Φ 200-5 系列轴流风机
Φ 200-5 Series Axial Fan

材 质：转子铸铝
Material: Aluminum casting
保护等级: IP44
Protection Class: IP44
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠轴承
Bearing: Maintenance Free Ball Bearing



2-Pole

4-Pole

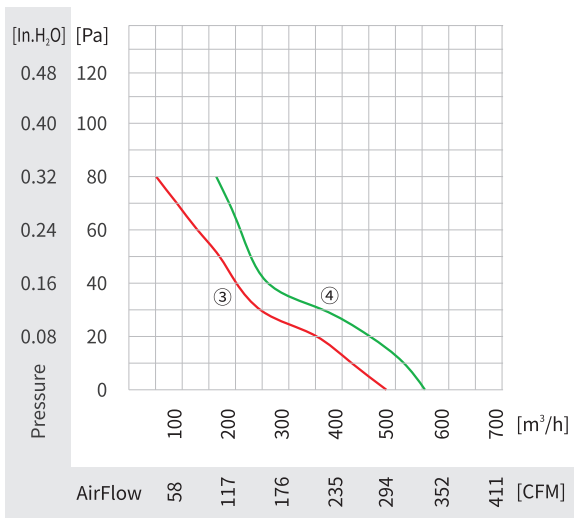
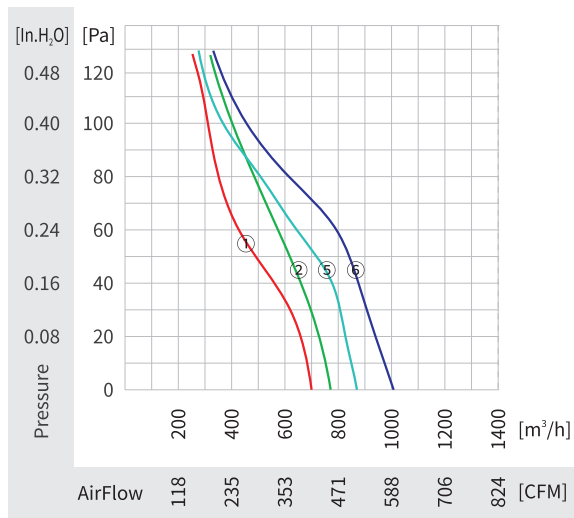


 B型网罩	 C型网罩	 E型导风筒	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.E	Model No.G	Model No.F0	Model No.F1
YWF.A2S-200S-5BIA00	YWF.A2S-200S-5CIA00	YWF.A2S-200S-5EIA00	/	YWF.A2S-200S-5FIA00	/
YWF.A4S-200S-5BIA00	YWF.A4S-200S-5CIA00	YWF.A4S-200S-5EIA00	/	YWF.A4S-200S-5FIA00	/
YWF.A2T-200S-5BIA00	YWF.A2T-200S-5CIA00	YWF.A2T-200S-5EIA00	/	YWF.A2T-200S-5FIA00	/
YWF.A4T-200S-5BIA00	YWF.A4T-200S-5CIA00	YWF.A4T-200S-5EIA00	/	YWF.A4T-200S-5FIA00	/
YWF.A2S-200S-5BIA05	YWF.A2S-200S-5CIA05	YWF.A2S-200S-5EIA05	/	YWF.A2S-200S-5FIA05	/
YWF.A4S-200S-5BIA05	YWF.A4S-200S-5CIA05	YWF.A4S-200S-5EIA05	/	YWF.A4S-200S-5FIA05	/
YWF.A2S-200S-7BIA00	YWF.A2S-200S-7CIA00	YWF.A2S-200S-7EIA00	/	YWF.A2S-200S-7FIA00	/
YWF.A2S-200S-7BIA05	YWF.A2S-200S-7CIA05	YWF.A2S-200S-7EIA05	/	YWF.A2S-200S-7FIA05	/



 Φ200-5

Model No.D

Model No.D

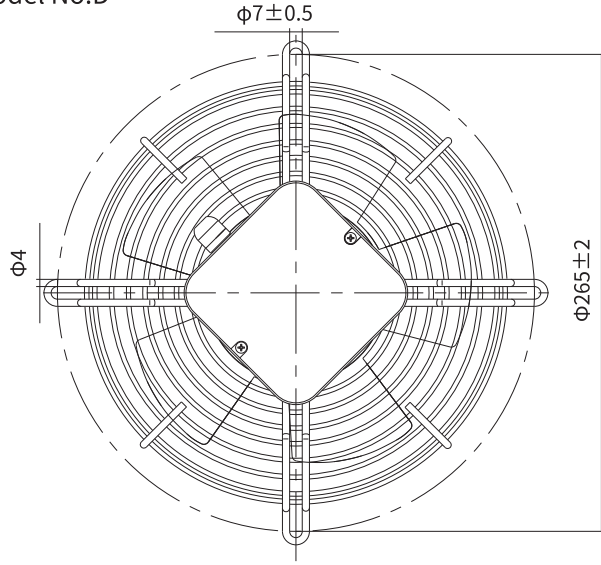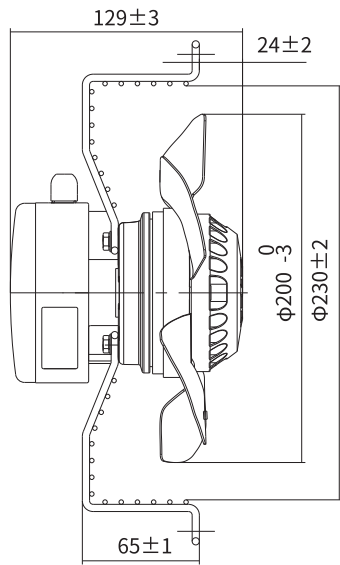

Model No.F0

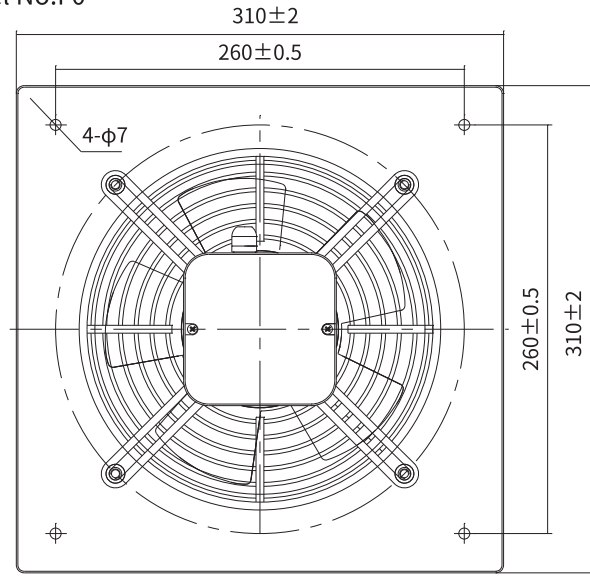
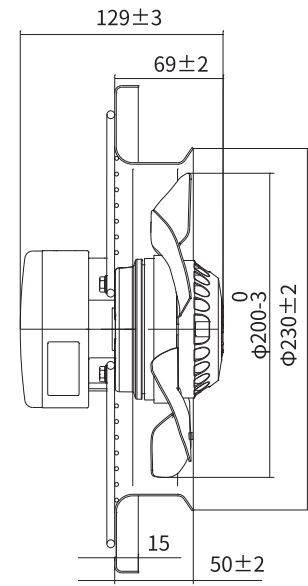


 D型网罩	电压 Voltage	频率 Frequency	电流 Current	输入功率 Input Power	转速 Speed	电容 Capacitor	风量 Air Flow(OPa)	噪音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认证 Approvals
Model No.D	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A2S-200S-5DIA00	220/230	50	0.20	45	2650	2	700/411	54	①	-30/+60	CCC,CE,RoHs
		60	0.26	56	2950		770/452	56	②		
YWF.A4S-200S-5DIA00	220/230	50	0.12	27	1400	1	480/282	41	③	-30/+60	CCC,CE,RoHs
		60	0.13	30	1680		560/329	45	④		
YWF.A2T-200S-5DIA00	380/400	50	0.10	45	2550	/	660/388	53	①	-30/+60	CCC,CE,RoHs
		60	0.11	50	2800		730/429	55	②		
YWF.A4T-200S-5DIA00	380/400	50	0.14	40	1400	/	480/282	41	③	-30/+60	CCC,CE,RoHs
		60	0.08	30	1700		560/329	45	④		
YWF.A2S-200S-5DIA05	115/120	50	0.40	45	2450	6	700/411	54	①	-30/+60	RoHs
		60	0.45	55	2800		770/452	56	②		
YWF.A4S-200S-5DIA05	115/120	50	0.17	19	1350	2	480/282	41	③	-30/+60	RoHs
		60	0.18	20	1600		560/329	45	④		
YWF.A2S-200S-7DIA10	220/230	50	0.30	72	2700	2	860/518	60	⑤	-30/+60	CCC,CE,RoHs
		60	0.35	80	3050		1010/576	64	⑥		
YWF.A2S-200S-7DIA15	115/120	50	0.57	60	2650	6	880/518	60	⑤	-30/+60	RoHs
		60	0.58	67	3000		1000/576	64	⑥		





Φ200-5

Model No.B

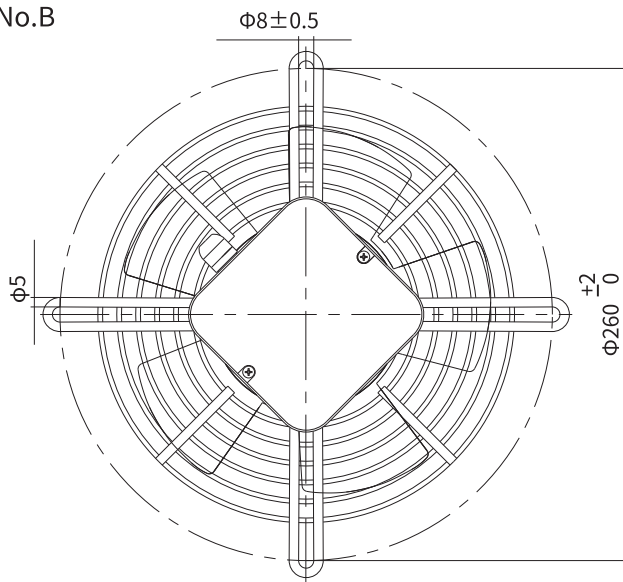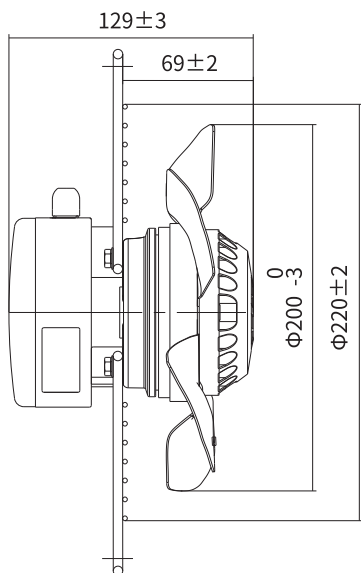

Model No.C

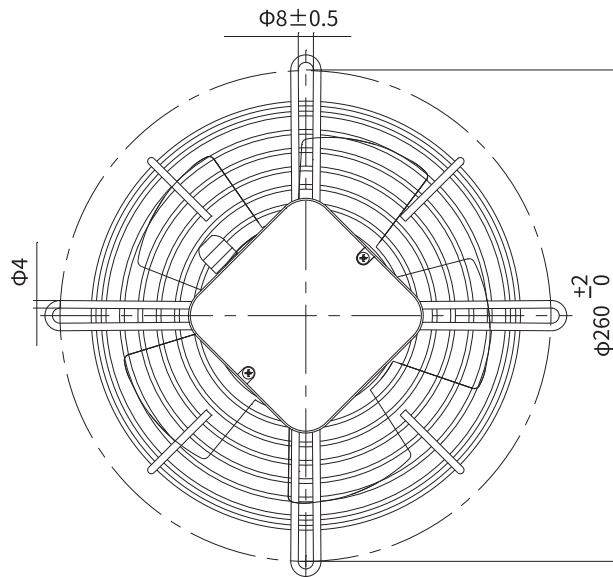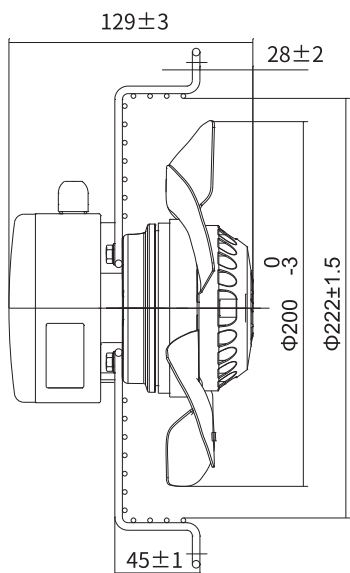

Model No.E

