

DC Backward Curved Centrifugal Fan

ErP2015
 EXCEEDS THE NORM



DC102-B310-L107


防护等级 (Level of protection): IP44

绝缘等级 (Insulation class): B

产品认证 (Approval): CE、CCC

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC102-B310-L107	48	/	1980	200	4.2	72	-20~+60

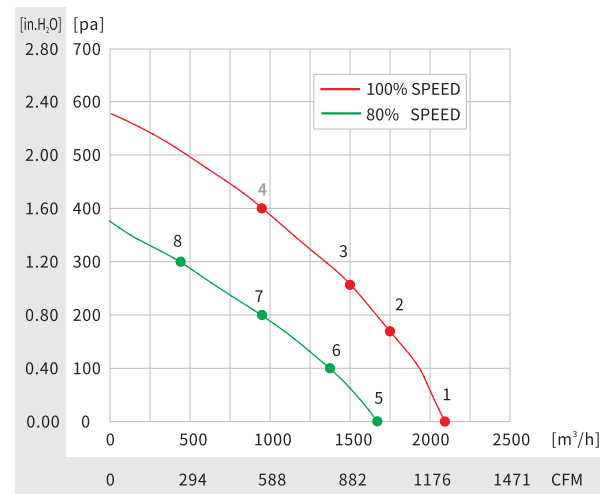

No.	转 速 Speed [RPM]	输入功率 Input Power [W]
1	1979	205.2
2	1936	210.6
3	1878	216.7
4	1904	213.1
5	1567	113.6
6	1545	116.7
7	1527	119.7
8	1523	118.8

DC Backward Curved Centrifugal Fan

ErP2015
 EXCEEDS THE NORM



DC102-B310-L137


防护等级 (Level of protection): IP44

绝缘等级 (Insulation class): B

产品认证 (Approval): CE、CCC

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC102-B310-L137	48	/	1860	230	4.77	72	-20~+60

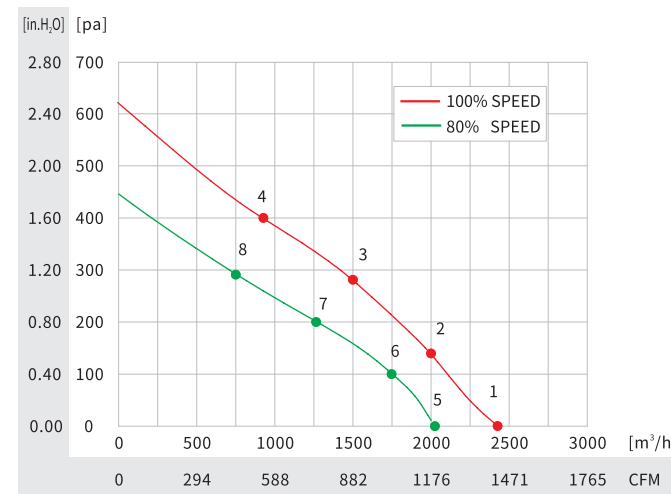

No.	转 速 Speed [RPM]	输入功率 Input Power [W]
1	1860	229.0
2	1771	235.3
3	1737	234.9
4	1804	227.2
5	1587	147.9
6	1520	158.8
7	1492	159.7
8	1537	149.7

