

 Φ150


Φ 150 系列管道风机
Φ 150 Series Duct Fan

材 质：蜗壳DC04、转子铸铝

保护等级: IP44

绝缘等级: F

轴 承: 免维护滚珠球轴承




Material: Housing: DC04 Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

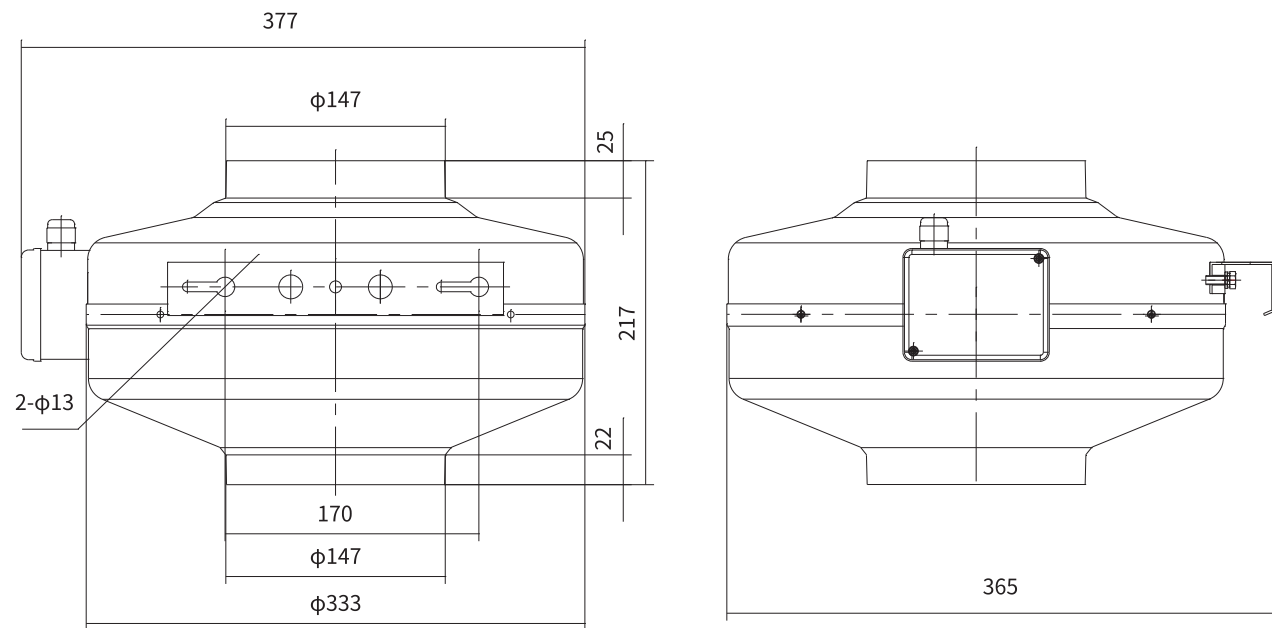

	电 压 Voltage	频 率 Frequency	电 流 Current	输入功率 Input Power	转 速 Speed	电 容 Capacitor	风 量 Air Flow	噪 音 Noise	曲 线 Curve No.	运行温度 Operating Temperature	认 证 Approvals
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.G2S-150-217AA2A	110/120	50	0.61	75	2550	10	450/260	67	①	-30/+60	CCC,CE,RoHs
		60	0.84	100	2700	10	500/290	68	②	-30/+60	CE,RoHs
YWF.G2S-150-217AA20	220/230	50	0.35	75	2535	3	450/260	67	①	-30/+60	CCC,CE,RoHs
		60	0.48	102	2700	3	500/290	68	②	-30/+60	CE,RoHs

 Φ160


Φ 160 系列管道风机
Φ 160 Series Duct Fan

材 质：蜗壳DC04、转子铸铝

保护等级: IP44

绝缘等级: F

轴 承: 免维护滚珠球轴承




Material: Housing: DC04 Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

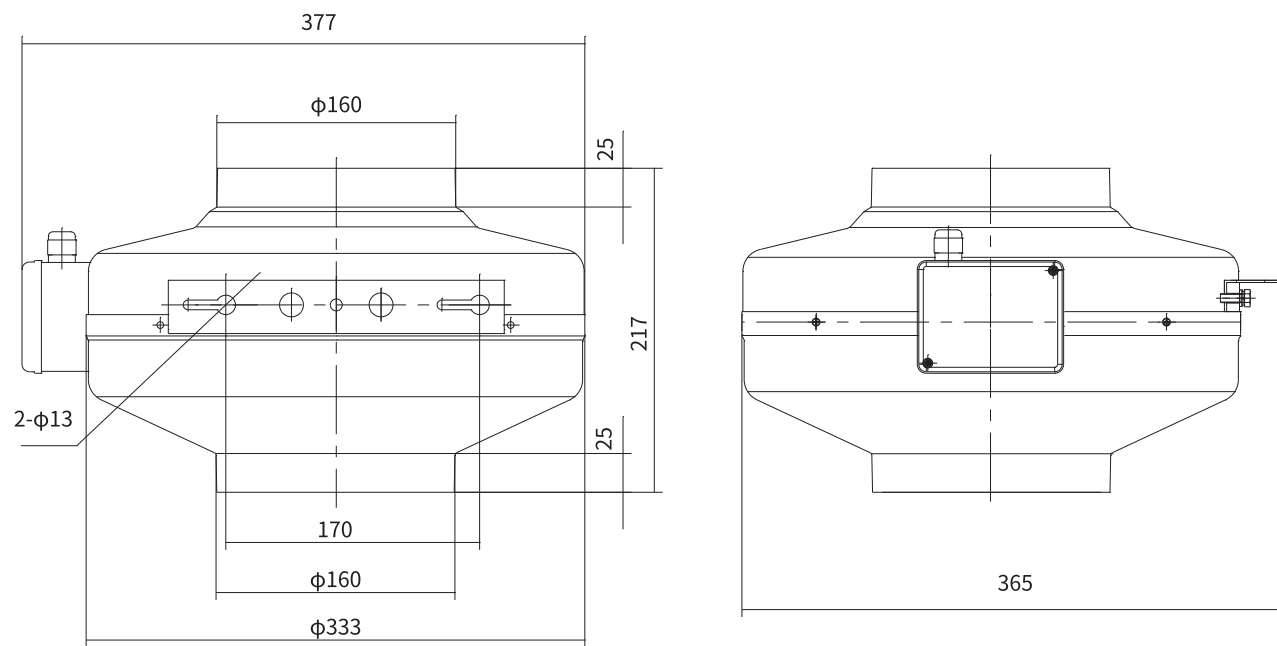

	电 压 Voltage	频 率 Frequency	电 流 Current	输入功率 Input Power	转 速 Speed	电 容 Capacitor	风 量 Air Flow	噪 音 Noise	曲 线 Curve No.	运行温度 Operating Temperature	认 证 Approvals
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.G2S-160-217AA0A	110/120	50	0.91	110	2435	12	710/417	72	①	-30/+60	CCC,CE,RoHs
		60	1.28	150	2430	12	715/420	73	②	-30/+60	CE,RoHs
YWF.G2S-160-217AA20	220/230	50	0.52	114	2415	4	710/417	72	①	-30/+60	CCC,CE,RoHs
		60	0.70	152	2430	4	715/420	73	②	-30/+60	CE,RoHs