

DC Backward Curved Centrifugal Fan

ErP2015
EXCEEDS THE NORM



DC102-B400-L142


防护等级 (Level of protection): IP44

绝缘等级 (Insulation class): B

产品认证 (Approval): CE、CCC

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC102-B400-L142	48	/	1290	200	4.2	72	-20~+60

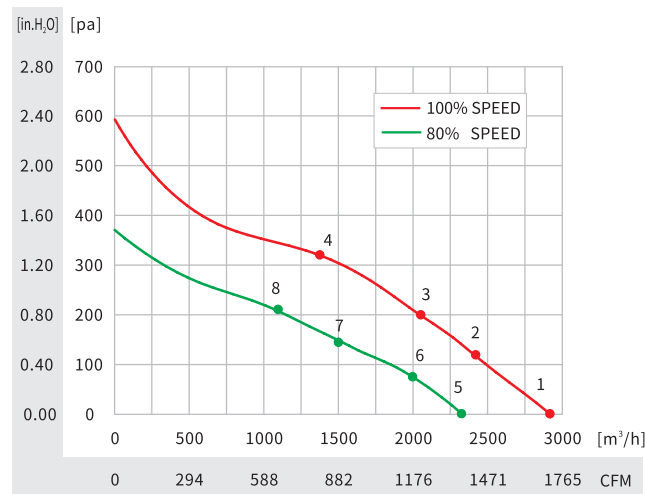

No.	转 速 Speed [RPM]	输入功率 Input Power [W]
1	1308	221.9
2	1254	230.7
3	1236	234.2
4	1265	226.7
5	1057	118.4
6	1023	126.7
7	1014	128.4
8	1027	124.7

DC Backward Curved Centrifugal Fan

ErP2015
EXCEEDS THE NORM



DC102-B400-L162


防护等级 (Level of protection): IP44

绝缘等级 (Insulation class): B

产品认证 (Approval): CE、CCC

轴承类型 (Bearing): Maintenance Free Ball Bearing

型 号 Model	额定电压 Rated Voltage	频 率 Frequency	转 速 Speed	输入功率 Input Power	电 流 Current	噪 音 Noise	使用温度 Applicable Temp
	VAC	Hz	RPM	W	A	dB	°C
DC102-B400-L162	48	/	1400	310	6.5	75	-20~+60

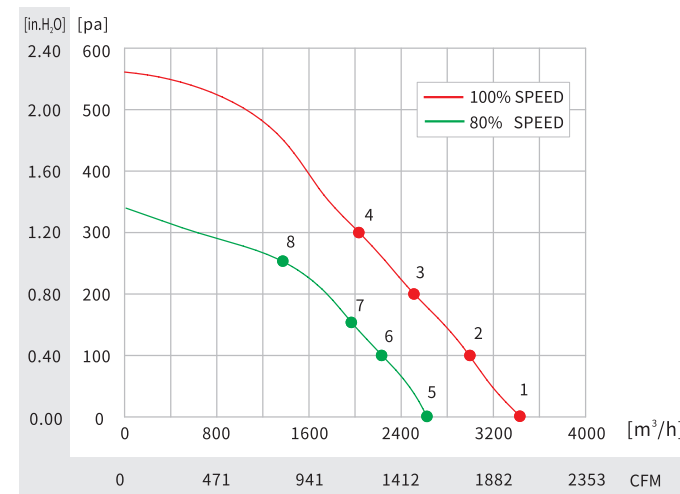

No.	转 速 Speed [RPM]	输入功率 Input Power [W]
1	1408	316.3
2	1360	314.6
3	1308	317.0
4	1299	319.9
5	1125	139.4
6	1125	163.0
7	1120	176.4
8	1122	179.5

