

 Φ400-5

Φ 400-5 系列轴流风机
Φ 400-5 Series Axial Fan



ErP2015
EXCEEDS THE NORM



材 质：转子铸铝
Material: Aluminum casting
保护等级: IP44
Protection Class: IP44
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing

4-Pole



6-Pole

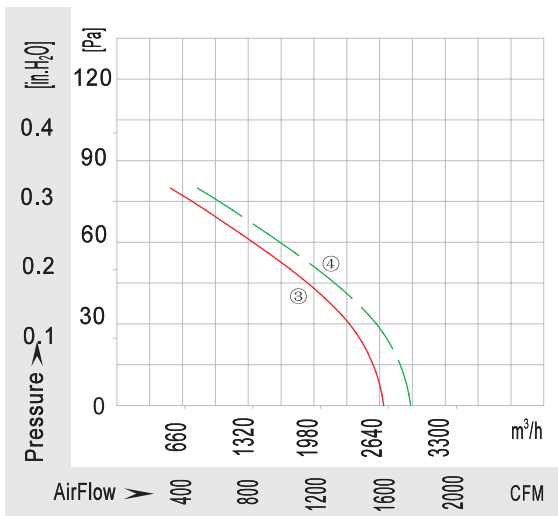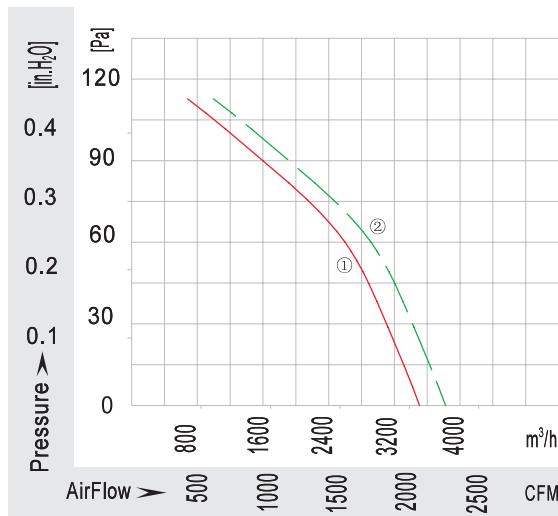



 B型网罩	 C型网罩	 E型导风筒	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.E	Model No.G	Model No.F0	Model No.F1
YWF.A4S-400S-5BIA00	YWF.A4S-400S-5CIA00	YWF.A4S-400S-5EIA00	YWF.A4S-400S-5GIA00	YWF.A4S-400S-5FIA00	\
YWF.A4T-400S-5BIA00	YWF.A4T-400S-5CIA00	YWF.A4T-400S-5EIA00	YWF.A4T-400S-5GIA00	YWF.A4T-400S-5FIA00	\
YWF.A6S-400S-5BIA00	YWF.A6S-400S-5CIA00	YWF.A6S-400S-5EIA00	YWF.A6S-400S-5GIA00	YWF.A6S-400S-5FIA00	\
YWF.A6T-400S-5BIA00	YWF.A6T-400S-5CIA00	YWF.A6T-400S-5EIA00	YWF.A6T-400S-5GIA00	YWF.A6T-400S-5FIA00	\
YWF.A4S-400S-5BIA05	YWF.A4S-400S-5CIA05	YWF.A4S-400S-5EIA05	YWF.A4S-400S-5GIA05	YWF.A4S-400S-5FIA05	\
YWF.A6S-400S-5BIA05	YWF.A6S-400S-5CIA05	YWF.A6S-400S-5EIA05	YWF.A6S-400S-5GIA05	YWF.A6S-400S-5FIA05	\

 Φ400-5

Model No.D

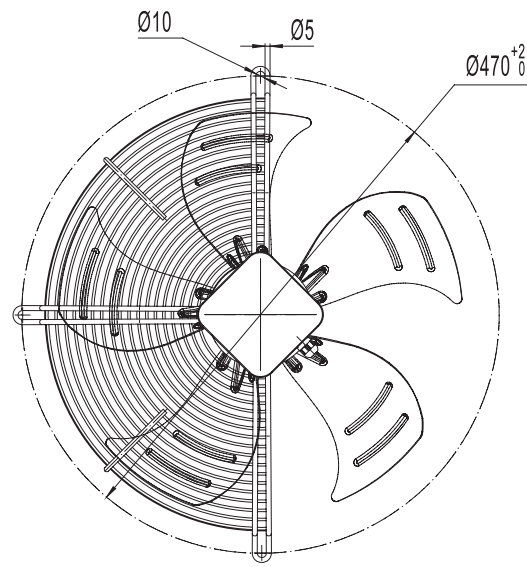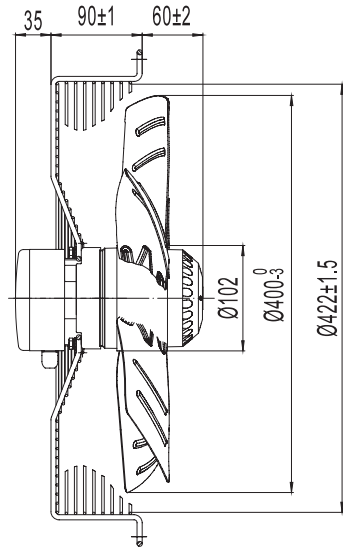


Model No.F1

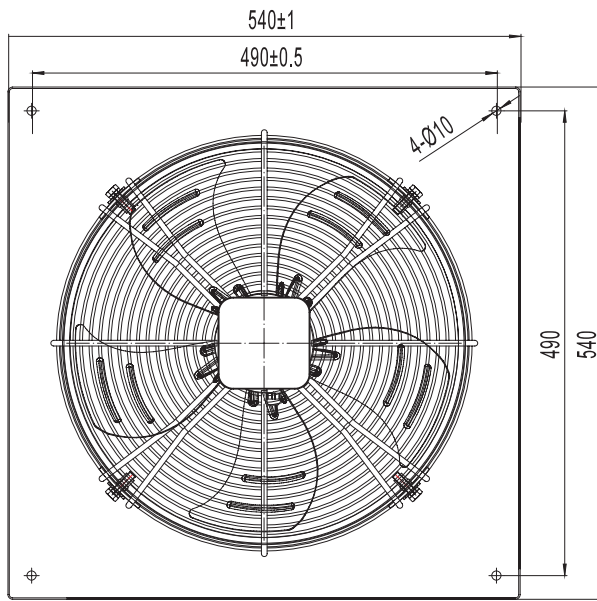
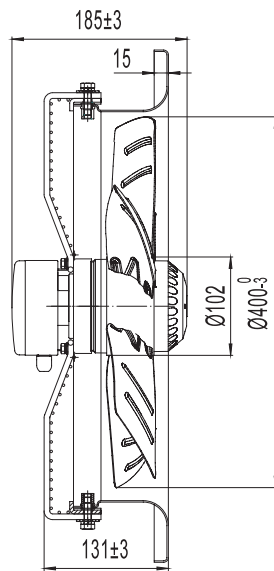


 D型网罩	电压 Voltage	频率 Frequency	电流 Current	输入功率 Input Power	转速 Speed	电容 Capacitor	风量 Air Flow(OPa)	噪音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认证 Approvals
Model No.D	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A4S-400S-5DIA00	220/230	50	0.90	190	1350	6	3500/2060	60	①	-30/+60	CCC,CE,RoHs
		60	1.22	270	1580		3800/2235	65	②		CCC,CE,RoHs,UL
YWF.A4T-400S-5DIA00	380/400	50	0.50	190	1370	/	3500/2060	60	①	-30/+60	CCC,CE,RoHs
		60	0.47	245	1620		3800/2235	65	②		CCC,CE,RoHs,UL
YWF.A4S-400S-5DIA00	220/230	50	0.50	110	950	4	2800/1647	55	③	-30/+60	CCC,CE,RoHs
		60	0.54	120	1100		3000/1765	57	④		CCC,CE,RoHs,UL
YWF.A4T-400S-5DIA00	380/400	50	0.31	110	930	/	2800/1647	55	④	-30/+60	CCC,CE,RoHs
		60	0.30	135	1050		3000/1765	57	③		CCC,CE,RoHs,UL
YWF.A4S-400S-5DIA05	115/120	50	1.70	190	1350	24	3500/2060	60	①	-30/+60	RoHs
		60	2.20	270	1500		3800/2235	65	②		RoHs,UL
YWF.A6S-400S-5FIA05	115/120	50	0.80	80	920	12	2800/1647	55	③	-30/+60	RoHs
		60	1.10	110	1000		3000/1765	57	④		RoHs,UL



Φ400-5

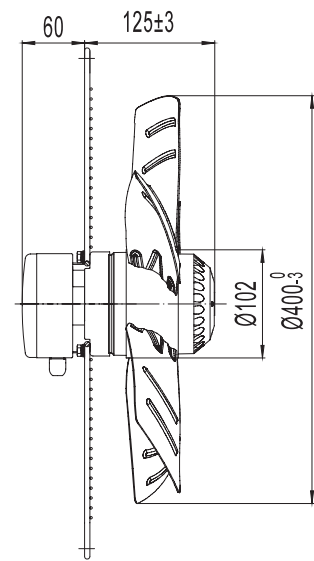


Model No.B

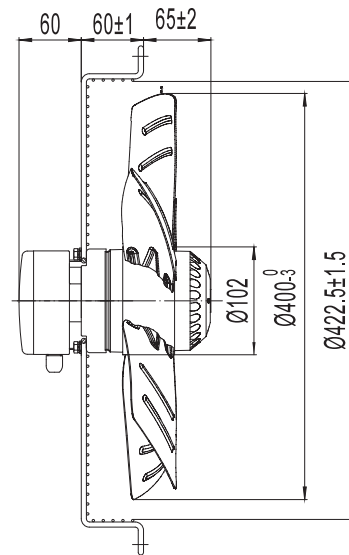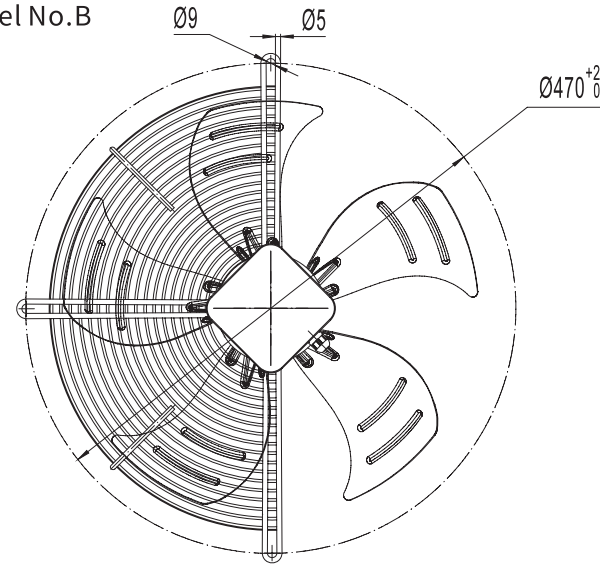

Model No.C

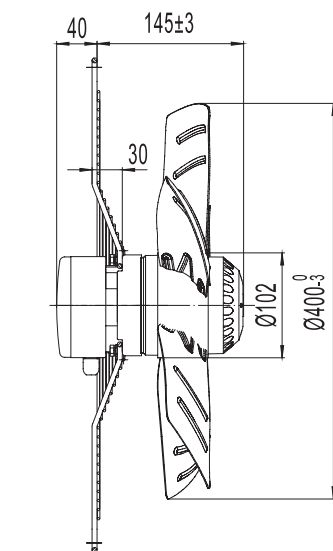
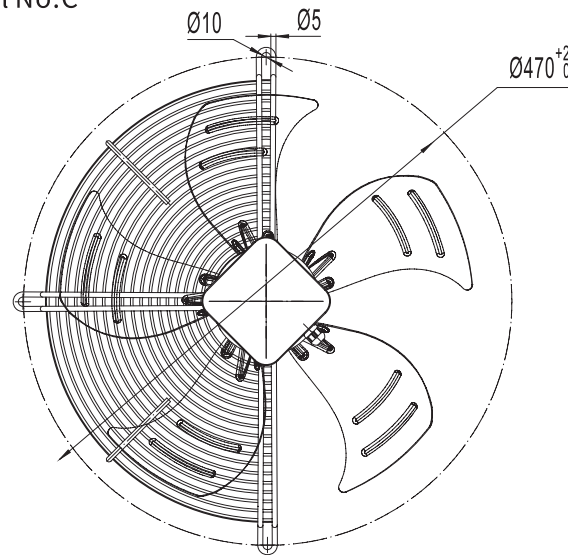


Model No.G

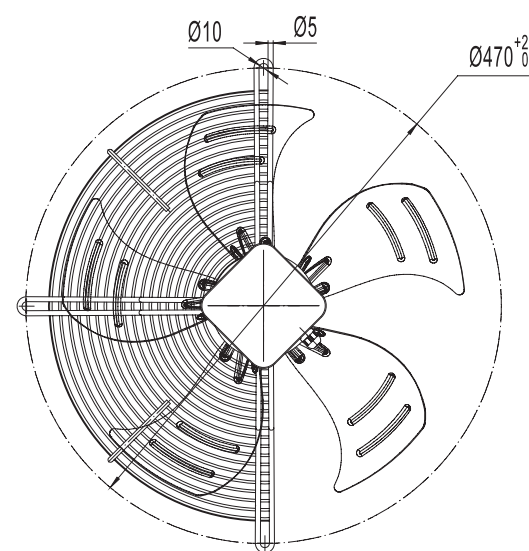

Φ400-5

Model No.E

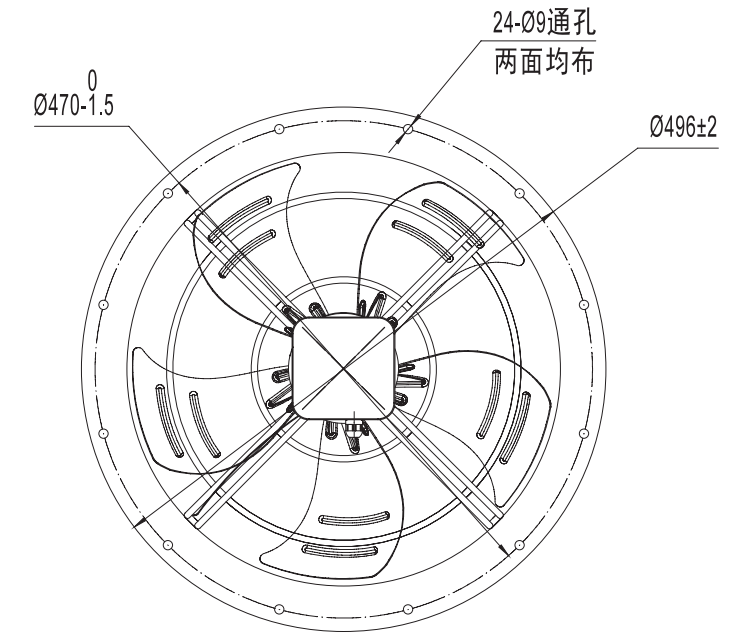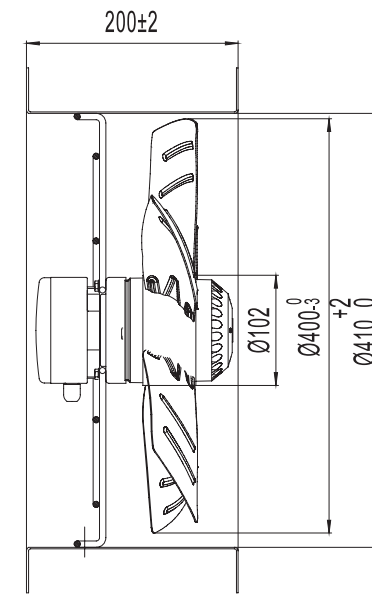

Model No.F0

