



ErP2015
EXCEEDS THE NORM




Φ 400 系列轴流风机
Φ 400 Series Axial Fan

材 质: 转子铸铝、叶轮塑料PP+GF
Material: Rotor: Aluminum Casting Impeller: PP Plastic
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing




4-pole



6-pole

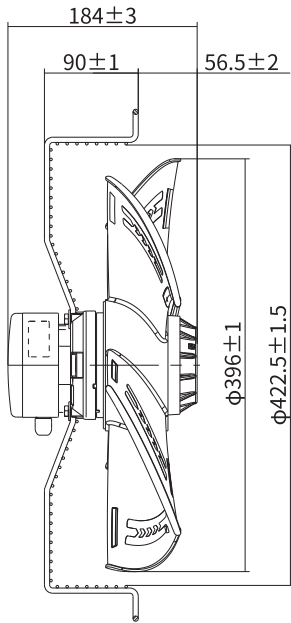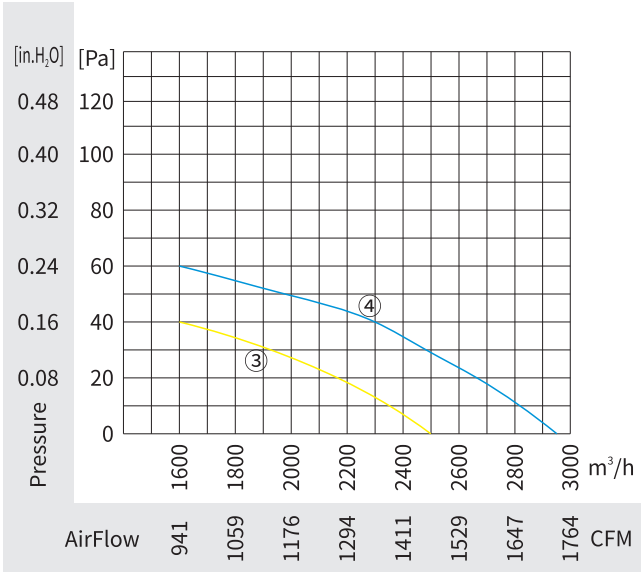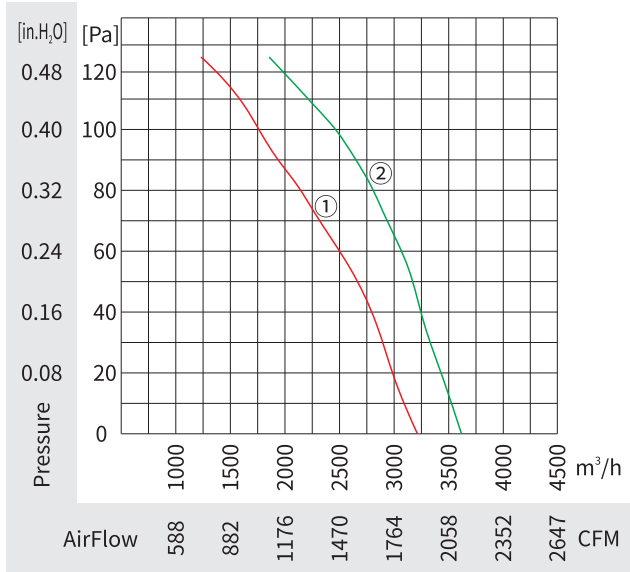

Model No.D

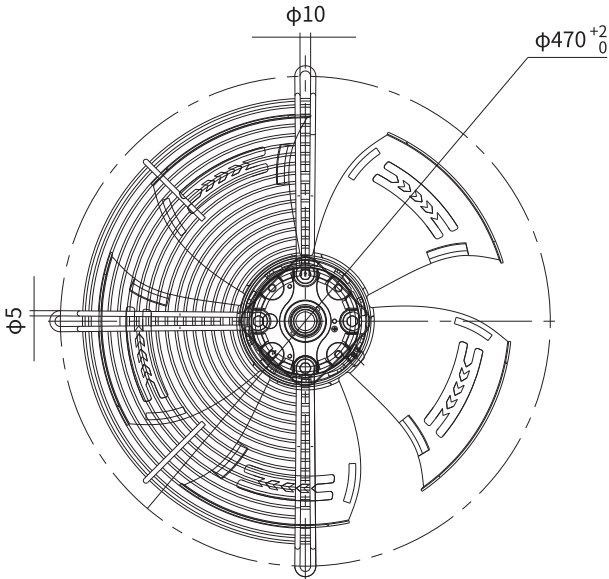

Model No.B

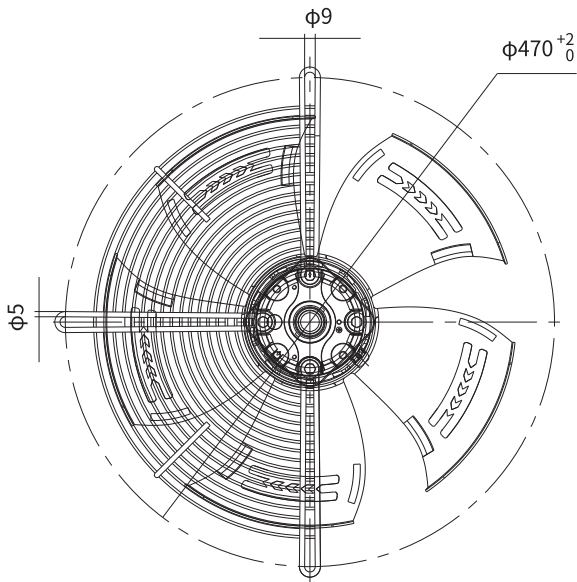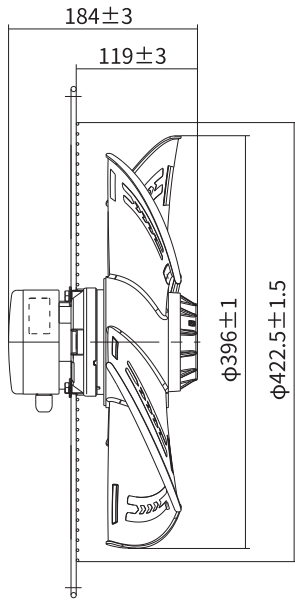

 B型网罩	 C型网罩	 E型导风筒	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.E	Model No.G	Model No.F0	Model No.F1
YWF.A4S-400S-5BIAP0	YWF.A4S-400S-5CIAP0	YWF.A4S-400S-5EIAPO	YWF.A4S-400S-5GIAP0	YWF.A4S-400S-5FIAP0	/
YWF.A4T-400S-5BIAP0	YWF.A4T-400S-5CIAP0	YWF.A4T-400S-5EIAPO	YWF.A4T-400S-5GIAP0	YWF.A4T-400S-5FIAP0	/
YWF.A6S-400S-5BIAP0	YWF.A6S-400S-5CIAP0	YWF.A6S-400S-5EIAPO	YWF.A6S-400S-5GIAP0	YWF.A6S-400S-5FIAP0	/
YWF.A6T-400S-5BIAP0	YWF.A6T-400S-5CIAP0	YWF.A6T-400S-5EIAPO	YWF.A6T-400S-5GIAP0	YWF.A6T-400S-5FIAP0	/





 D型网罩	电压 Voltage	频率 Frequency	电流 Current	输入功率 Input Power	转速 Speed	电容 Capacitor	风量 Air Flow(OPa)	噪音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认证 Approvals
Model No.D	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A4S-400S-5DIAP0	220/230	50	0.76	170	1400	6	3780/2225	58	①	-30 / +60	CCC,CE,RoHS
		60	1.07	240	1600		4380/2575	61	②		CCC,CE,RoHS
YWF.A4T-400S-5DIAP0	380/400	50	0.50	160	1400	/	3850/2265	60	①	-30 / +60	CCC,CE,RoHS
		60	0.50	220	1600		4400/2590	63	②		CCC,CE,RoHS
YWF.A6S-400S-5DIAP0	220/230	50	0.44	95	930	4	2520/1480	52	③	-30 / +60	CCC,CE,RoHS
		60	0.49	110	1100		2970/1745	56	④		CCC,CE,RoHS
YWF.A6T-400S-5DIAP0	380/400	50	0.30	90	940	/	2520/1480	54	③	-30 / +60	CCC,CE,RoHS
		60	0.25	95	1100		2950/1735	57	④		CCC,CE,RoHS

Φ400

Φ400

Model No.C

Model No.E

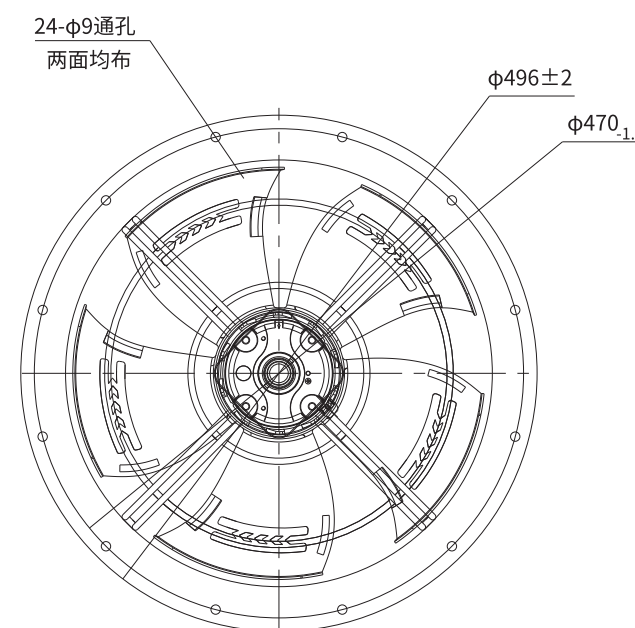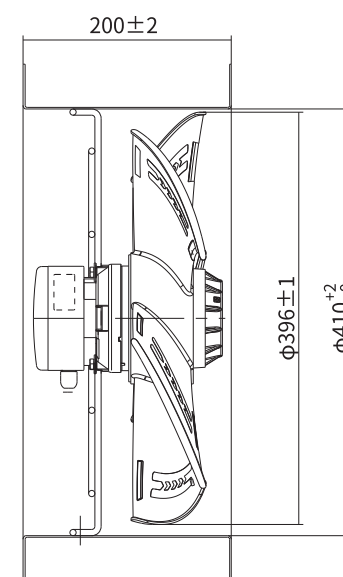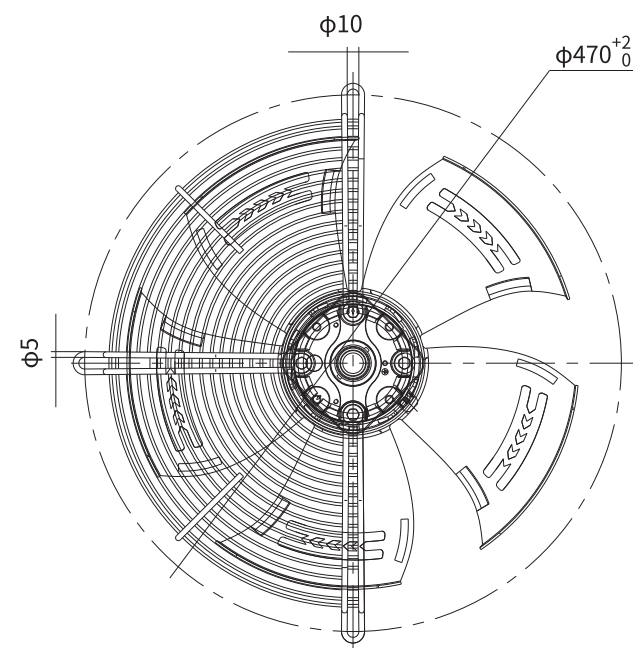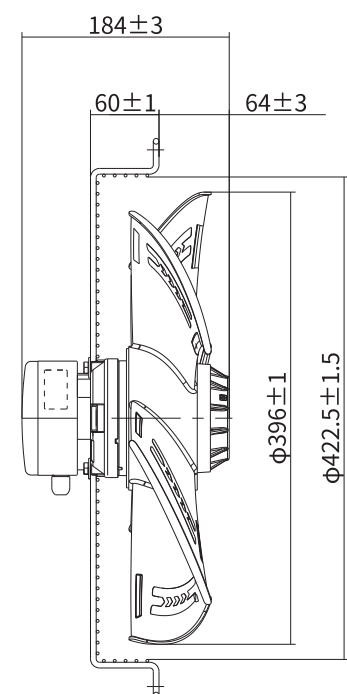

Model No.G

Model No.F0

