



Φ 200 系列蜗壳风机


Φ 200 Series Housing Centrifugal Fan

材 质：风轮镀锌板、转子铸铝

保护等级：IP44

绝缘等级：F

轴 承：免维护滚珠球轴承




Material: Impeller:Galvanized Plate Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

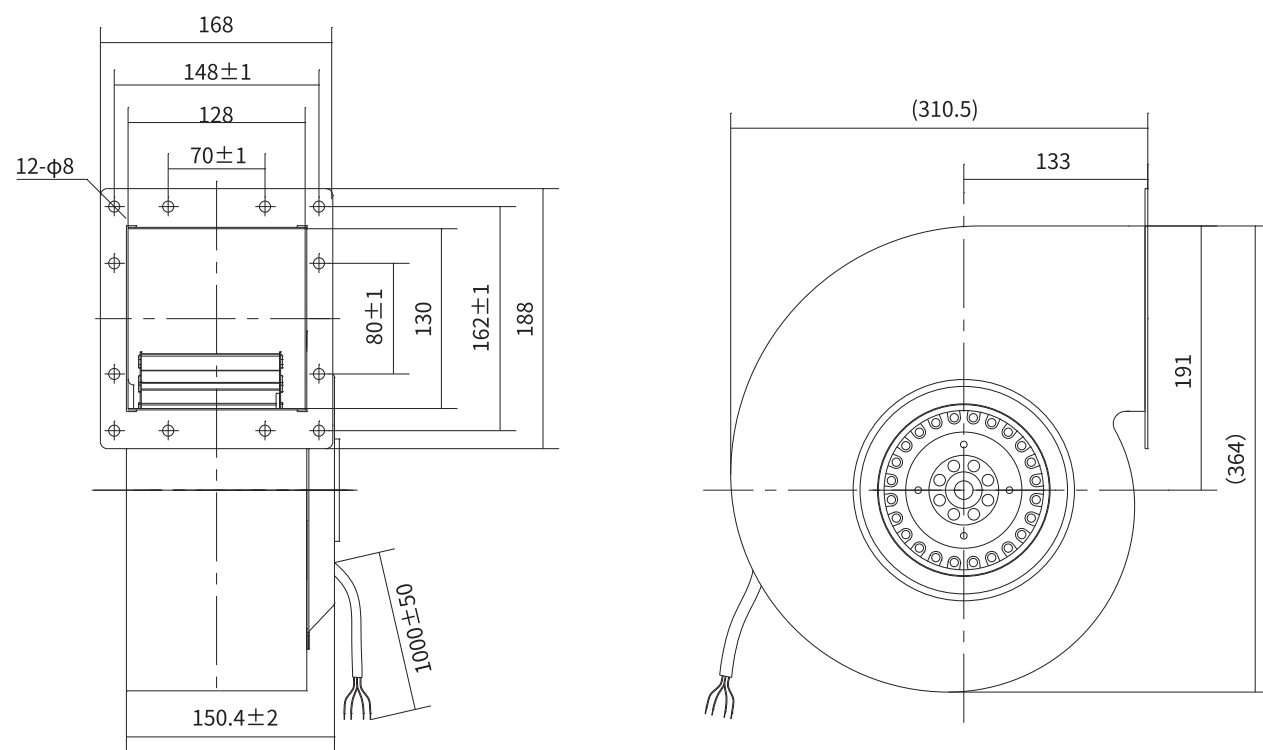

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	Curve No.	Operating Temperature	Approvals
YWF.F4S-200-102AA0A	115/120	50	2.10	238	1160	12	1000/588	66	①	-30/+60	RoHs
	115/120	60	2.40	280	940	12	850/500	67	②	-30/+60	RoHs
YWF.F4S-200-102AA00	220/230	50	0.90	200	1220	3.5	1000/588	66	①	-30/+60	CCC,CE,RoHs
	220/230	60	1.14	256	1160	3.5	850/500	67	②	-30/+60	CE,RoHs
YWF.F4T-200-102AA00	380/400	50	0.37	193	1260	/	1000/588	66	①	-30/+60	CCC,CE,RoHs
	380/400	60	0.47	269	1290	/	850/500	67	②	-30/+60	CE,RoHs



Φ 120 系列蜗壳风机


Φ 120 Series Housing Centrifugal Fan

材 质：风轮镀锌板、转子铸铝

保护等级：IP44

绝缘等级：F

轴 承：免维护滚珠球轴承

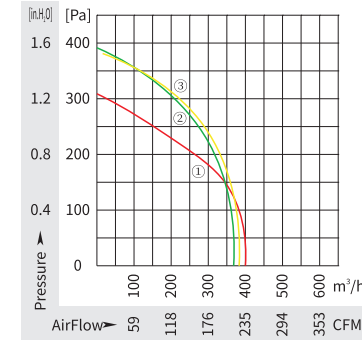


Material: Impeller:Galvanized Plate Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

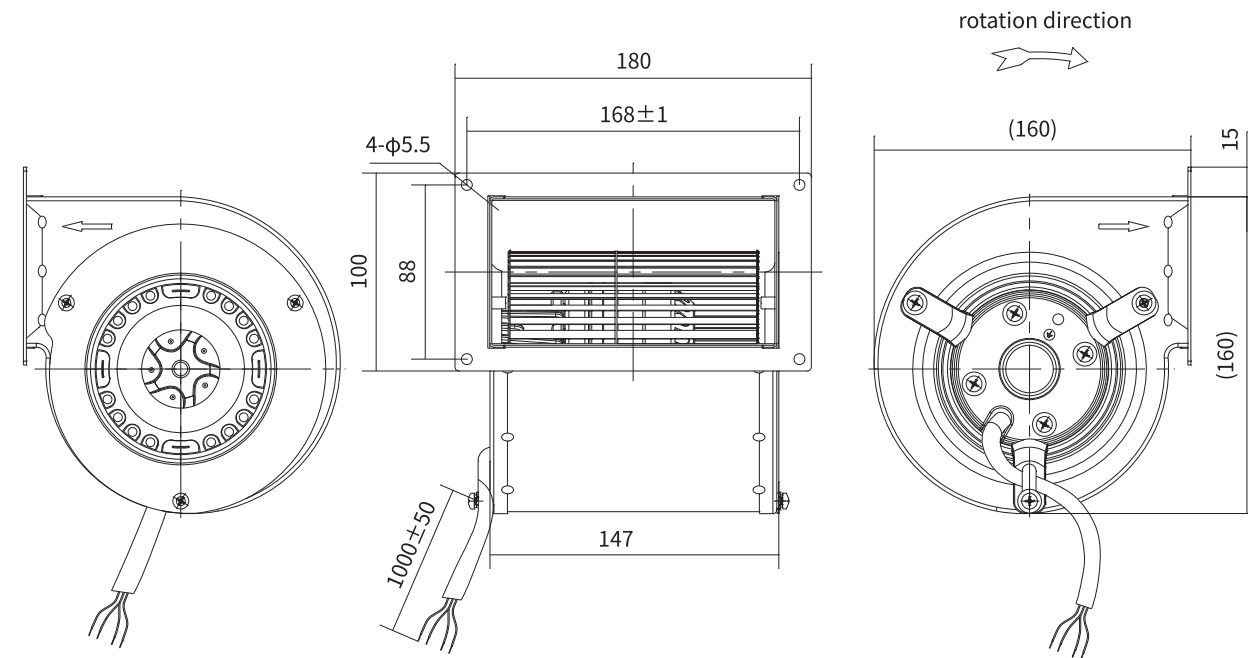

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	Curve No.	Operating Temperature	Approvals
YWF.F2S-120-120AA00	220/230	50	0.45	95	1625	3	405/235	60	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.51	113	1525	3	375/220	57	②	-30/+60	CE,RoHs
YWF.F2S-120-120AA0A	115/120	60	1.10	131	1650	10	385/225	59	③	-30/+60	RoHs