





Φ 500 系列轴流风机
Φ 500 Series Axial Fan

材 质：转子铸铝、叶轮塑料PP+GF
Material: Rotor: Aluminum Casting Impeller: PP Plastic
保护等级: IP54
Protection Class: IP54
绝缘等级: F
Insulation Class: F
轴 承: 免维护滚珠球轴承
Bearing: Maintenance Free Ball Bearing





4-pole



6-pole

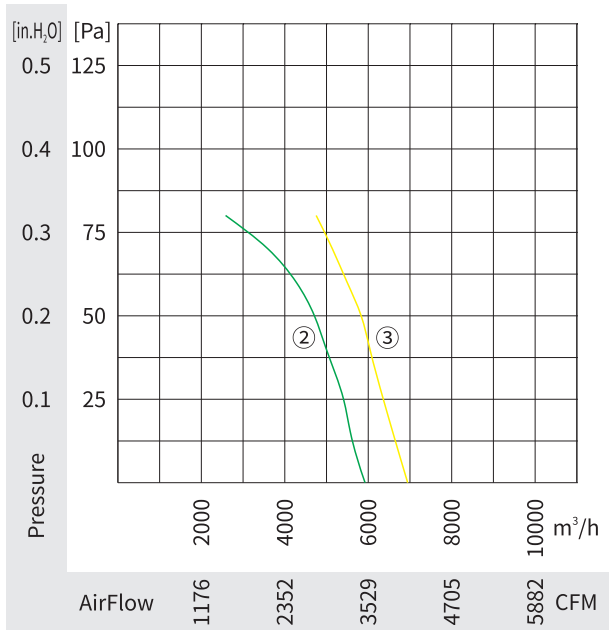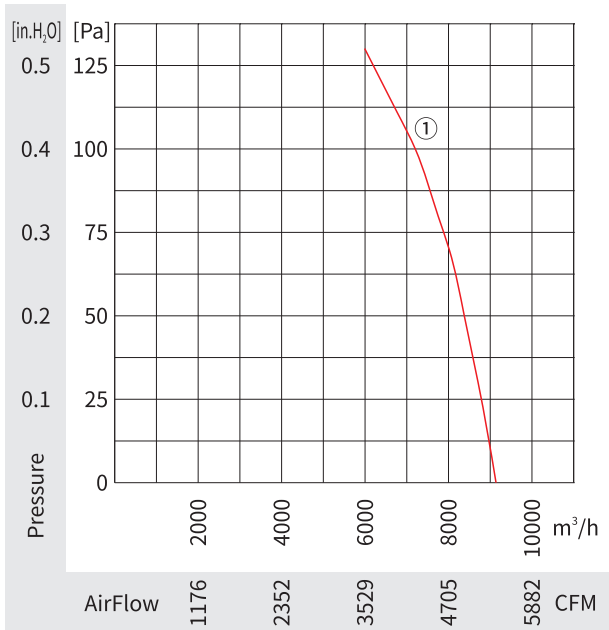

 B型网罩	 C型网罩	 E型导风筒	 G型网罩	 F型正扣面板	 F型反扣面板
Model No.B	Model No.C	Model No.E	Model No.G	Model No.F0	Model No.F1
YWF.A4S-500S-5BIAP1	YWF.A4S-500S-5CIAP1	YWF.A4S-500S-5DIAP1	YWF.A4S-500S-5GIAP1	/	YWF.A4S-500S-5FIAP1
YWF.A4T-500S-5BIAP0	YWF.A4T-500S-5CIAP0	YWF.A4T-500S-5DIAP0	YWF.A4T-500S-5GIAP0	/	YWF.A4T-500S-5FIAP0
YWF.A4T-500S-5BIAP1	YWF.A4T-500S-5CIAP1	YWF.A4T-500S-5DIAP1	YWF.A4T-500S-5GIAP1	/	YWF.A4T-500S-5FIAP1
YWF.A6S-500S-5BIAP0	YWF.A6S-500S-5CIAP0	YWF.A6S-500S-5DIAP0	YWF.A6S-500S-5GIAP0	/	YWF.A6S-500S-5FIAP0
YWF.A6T-500S-5BIAP0	YWF.A6T-500S-5CIAP0	YWF.A6T-500S-5DIAP0	YWF.A6T-500S-5GIAP0	/	YWF.A6T-500S-5FIAP0

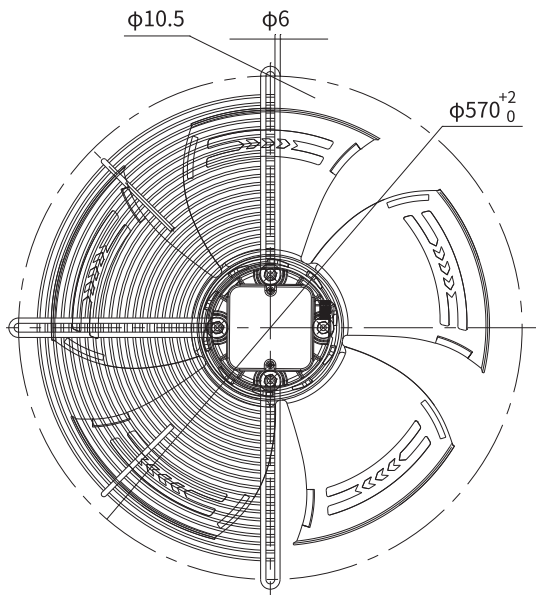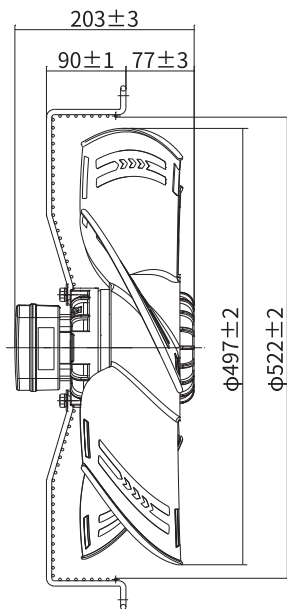

Model No.D



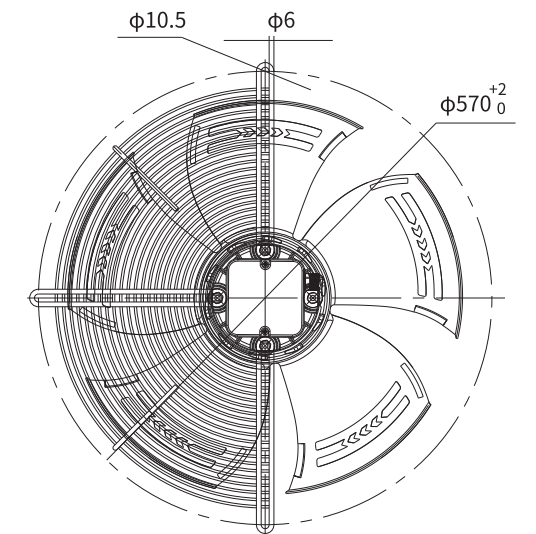
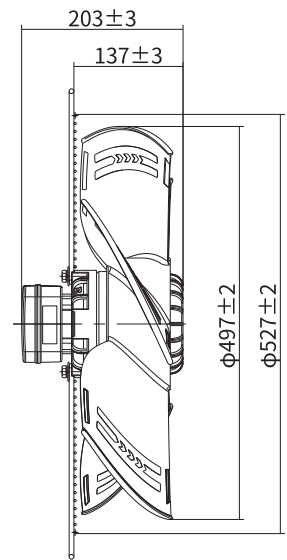


Model No.B

 D型网罩	电压 Voltage	频率 Frequency	电 流 Current	输入功率 Input Power	转速 Speed	电 容 Capacitor	风量 Air Flow(OPa)	噪 音 Noise	曲线 Curve No.	运行温度 Operating Temperature	认 证 Approvals
Model No.D	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	
YWF.A4S-500S-5EIAP1	380/400	50	3.26	700	1400	16	9520/5410	74	①	-30 / +60	CCC,CE,RoHS
YWF.A4T-500S-5EIAP0	380/400	50	1.23	620	1340	/	9190/5410	73	①	-30 / +60	CCC,CE,RoHS
YWF.A4T-500S-5EIAP1	380/400	50	1.39	650	1390	/	9190/5410	73	①	-30 / +60	CCC,CE,RoHS
YWF.A6S-500S-5EIAP0	220/230	50	1.23	264	900	10	6000/3530	67	②	-30 / +60	CCC,CE,RoHS
		60	1.60	360	1000		7000/4120	69	③		CCC,CE,RoHS
YWF.A6T-500S-5EIAP0	380/400	50	0.99	280	940	/	5950/3500	63	②	-30 / +60	CCC,CE,RoHS
		60	0.98	360	1090		6950/4090	66	③		CCC,CE,RoHS





 **Φ500**
Model No.C

 **Φ500**
Model No.E

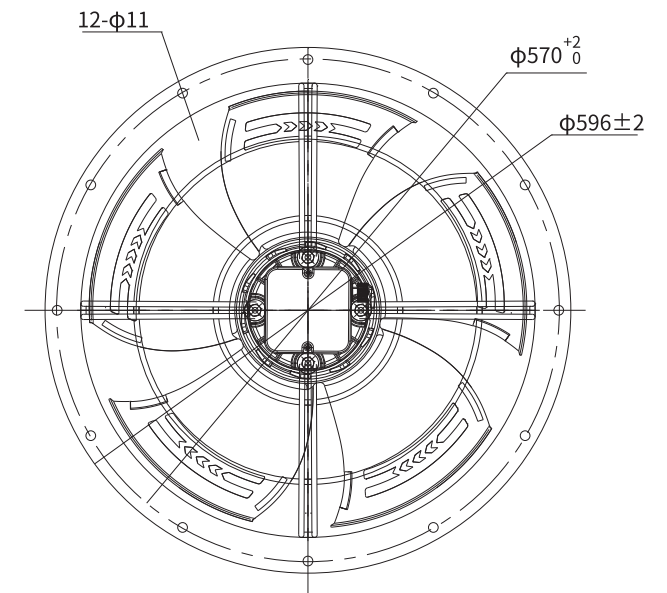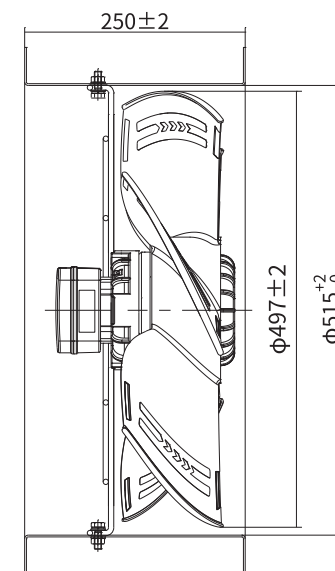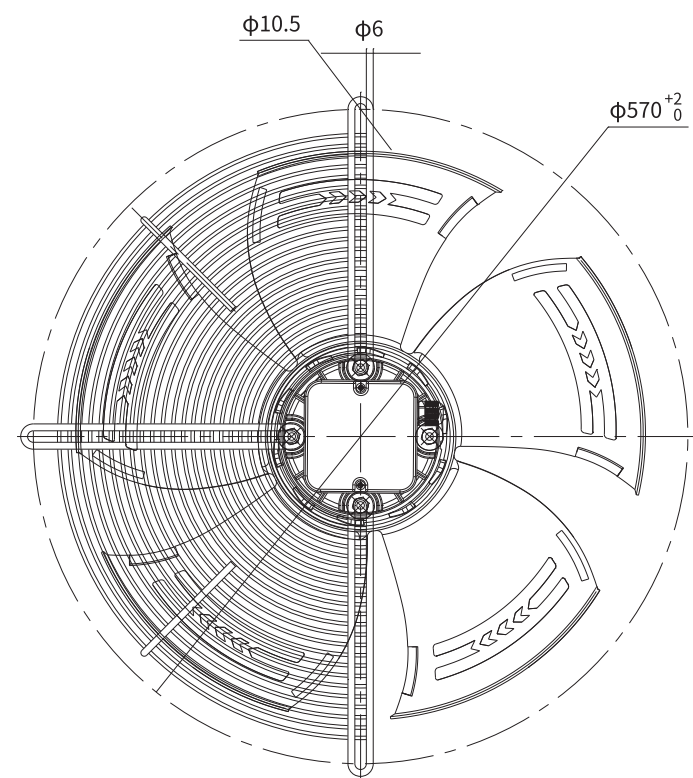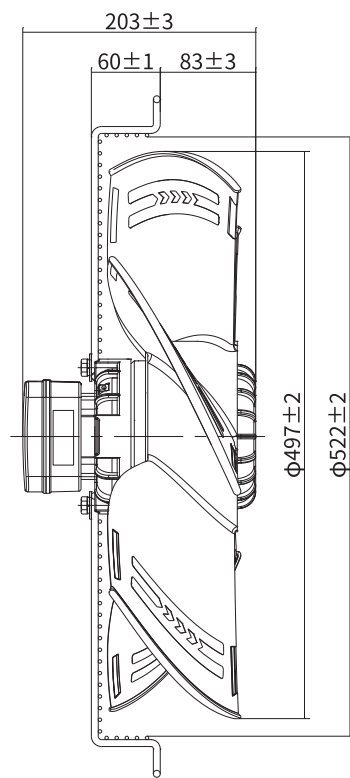



Model No.G

Model No.F0

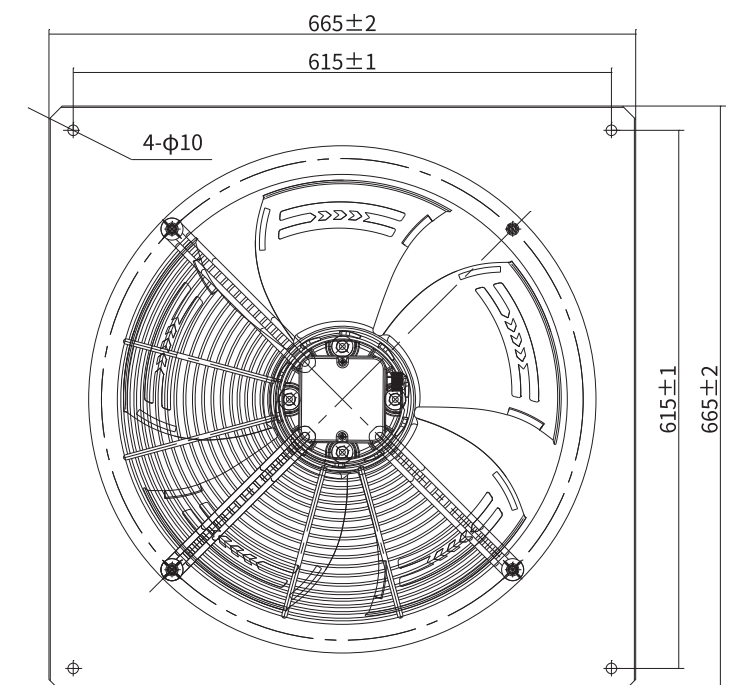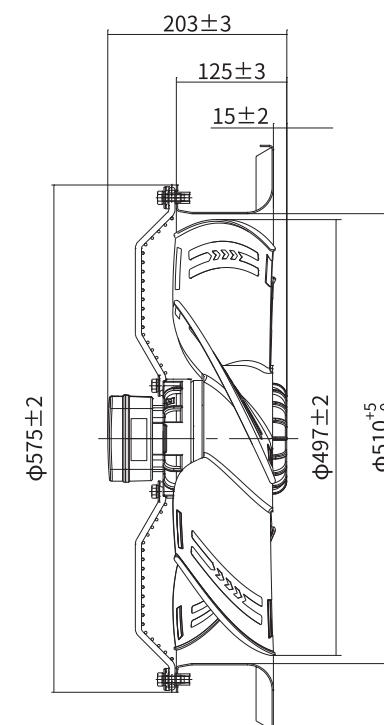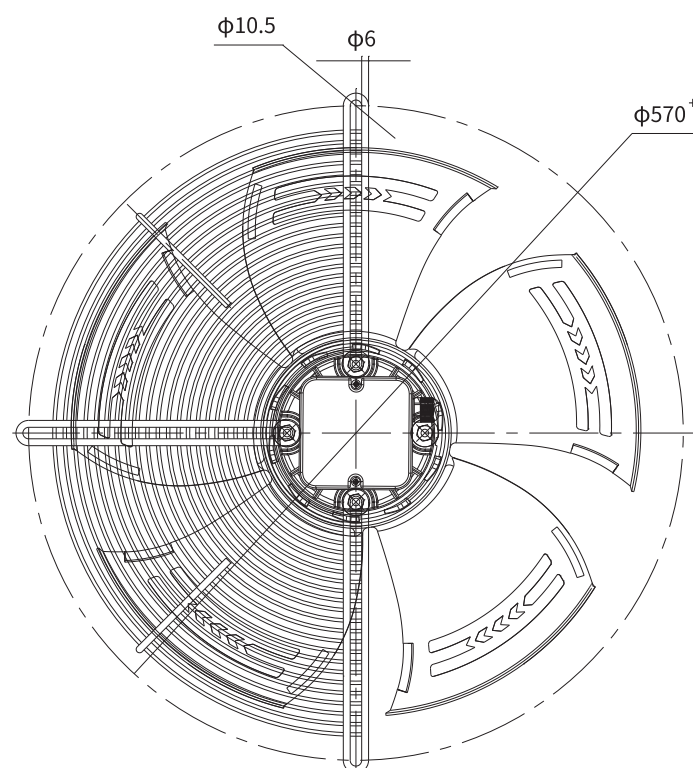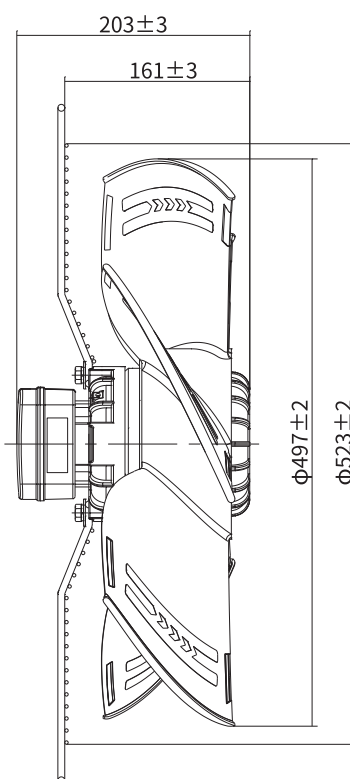


Φ500

Model No.E

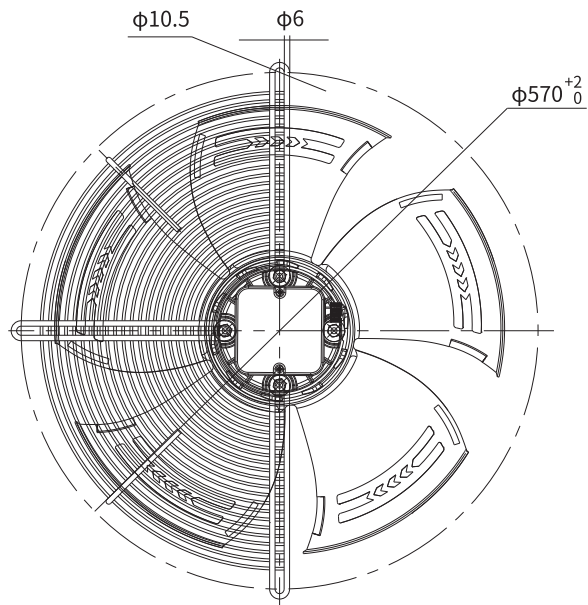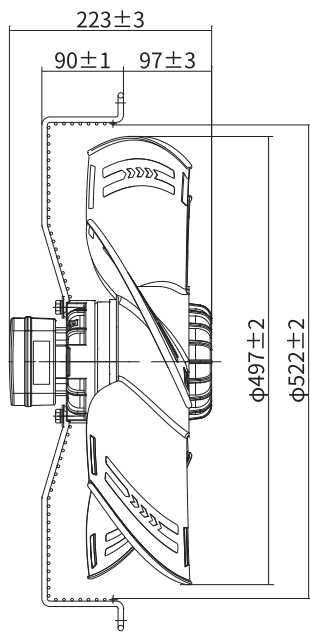

Model No.F0

