

Φ140

Φ150




Φ 140 系列前倾离心风机
Φ 140 Series Forward Centrifugal Fan

材 质: 风轮镀锌板、转子铸铝

保护等级: IP44

绝缘等级: F

轴 承: 免维护滚珠球轴承

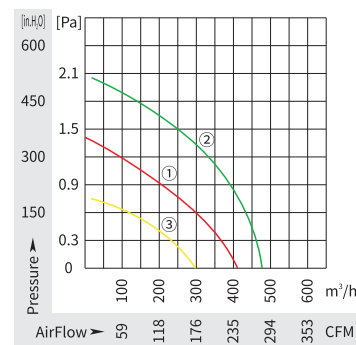

Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing




Φ 150 系列前倾离心风机
Φ 150 Series Forward Centrifugal Fan

材 质: 风轮镀锌板、转子铸铝

保护等级: IP44

绝缘等级: F

轴 承: 免维护滚珠球轴承




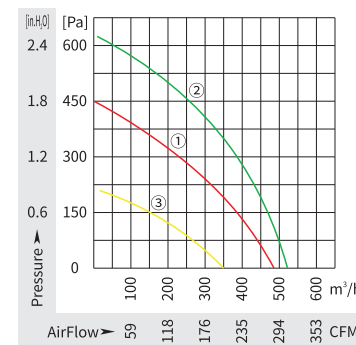


Material: Impeller: Steel Sheet Rotor: Aluminum Casting

Protection Class: IP44

Insulation Class: F

Bearing: Maintenance free ball bearing

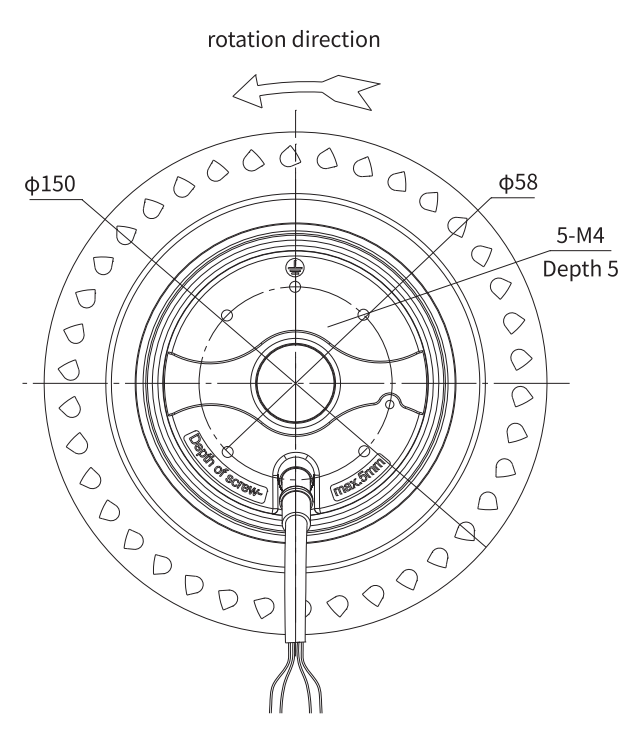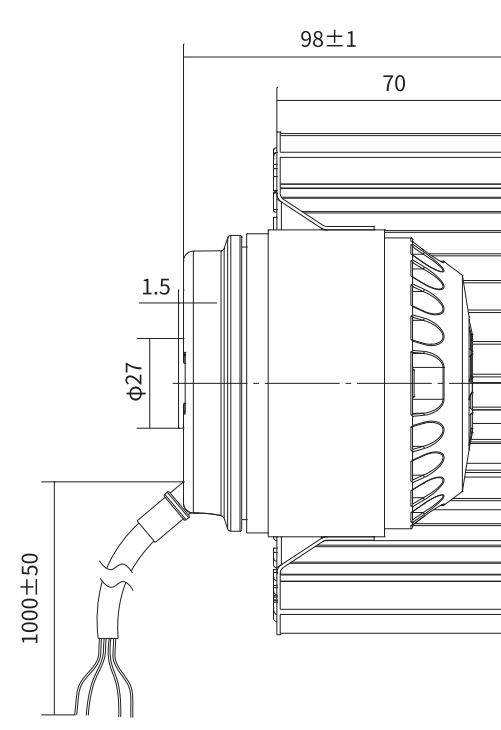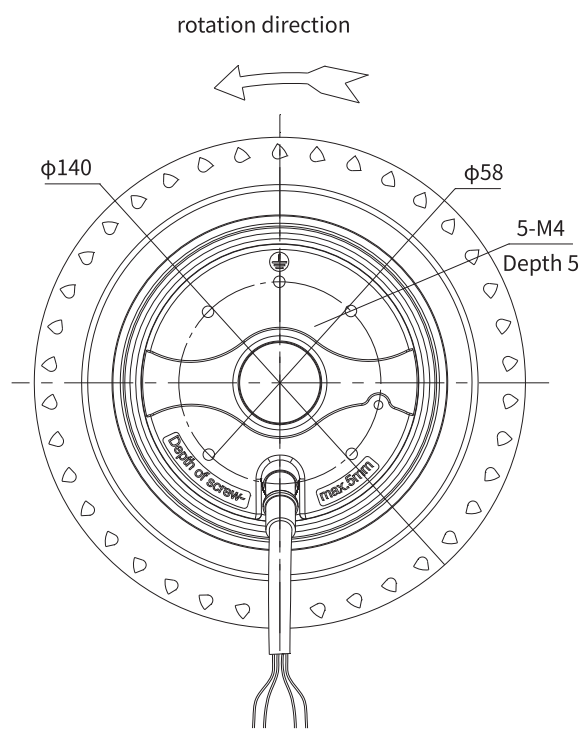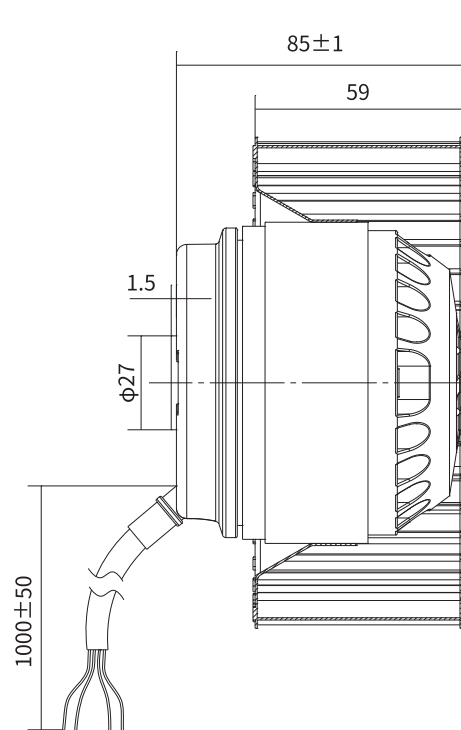

备注: 此款风机可正反向定制
Remarks: This fan can be designed as clockwise and counterclockwise rotation

Model No.	电压 Voltage V	频率 Frequency Hz	电 流 Current A	输入功率 Input Power W	转速 Speed RPM	电容 Capacitor μF	风量 Air Flow m³/h/CFM	噪音 Noise dB(A)	曲线 Curve No. #	运行温度 Operating Temperature Min/Max(°C)	认证 Approvals
YWF.F2S-140-059AX0A	115/120	60	1.20	150	3200	16	470/275	68	②	-30/+60	RoHs
YWF.F4S-140-059AX0A	115/120	60	0.35	42	1700	6	295/175	52	③	-30/+60	RoHs
YWF.F2S-140-059AX00	220/230	50	0.39	84	2840	4	390/230	68	①	-30/+60	CCC,CE,RoHs
	220/230	60	0.65	130	3285	4	470/275	68	②	-30/+60	CE,RoHs

Model No.	电压 Voltage V	频率 Frequency Hz	电 流 Current A	输入功率 Input Power W	转速 Speed RPM	电容 Capacitor μF	风量 Air Flow m³/h/CFM	噪音 Noise dB(A)	曲线 Curve No. #	运行温度 Operating Temperature Min/Max(°C)	认证 Approvals
YWF.F2S-150-070AX0A	115/120	60	1.65	184	2975	20	535/310	72	②	-30/+60	UL,Rohs
YWF.F4S-150-070AX0A	115/120	60	0.63	75	1700	10	350/207	55	③	-30/+60	UL,Rohs
YWF.F2S-150-070AX00	220/230	50	0.63	136	2630	6	480/283	67	①	-30/+60	CCC,CE,Rohs
	220/230	60	0.90	190	2930	6	535/315	71	②	-30/+60	CCC,CE,Rohs