


Φ315

Φ 315 系列后倾离心风机
 Φ 315 Series Backward Centrifugal Fan

材 质：风轮铝合金、转子铸铝
 保护等级：IP54
 绝缘等级：F
 轴 承：免维护滚珠球轴承

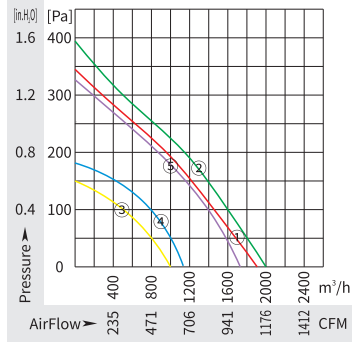


Material: Impeller: Aluminum Alloy Rotor: Aluminum Casting
 Protection Class: IP54
 Insulation Class: F
 Bearing: Maintenance free ball bearing



Φ355

Φ 355 系列后倾离心风机
 Φ 355 Series Backward Centrifugal Fan

材 质：风轮铝合金、转子铸铝
 保护等级：IP54
 绝缘等级：F
 轴 承：免维护滚珠球轴承

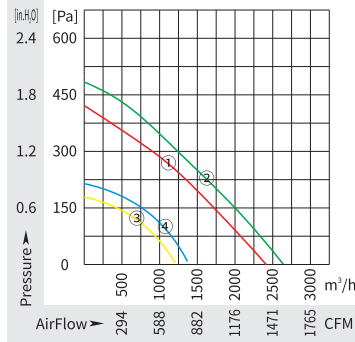

Material: Impeller: Aluminum Alloy Rotor: Aluminum Casting
 Protection Class: IP54
 Insulation Class: F
 Bearing: Maintenance free ball bearing

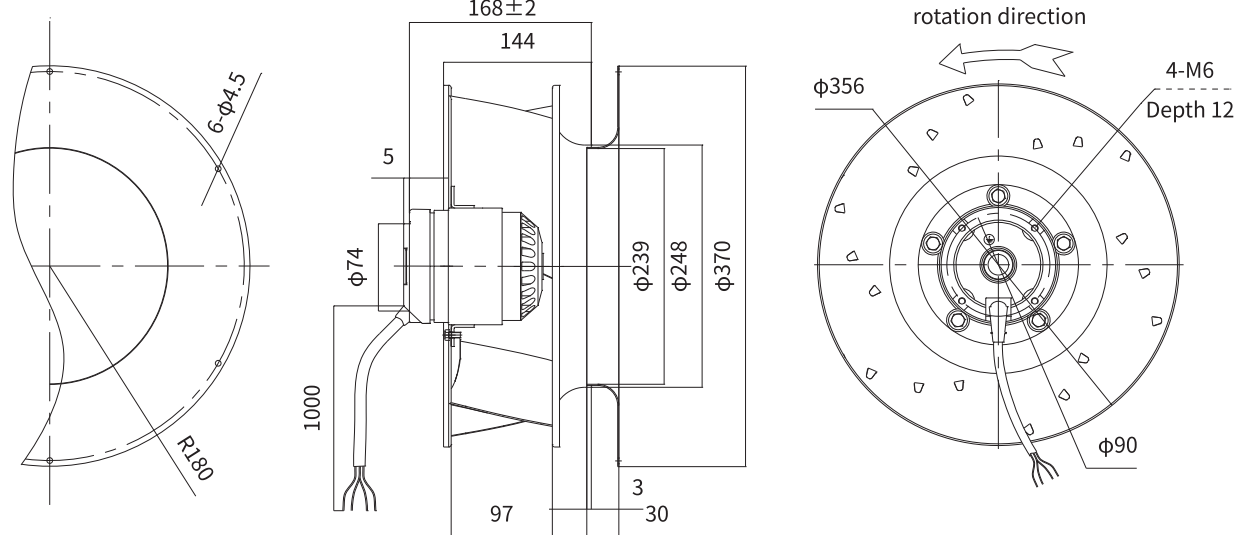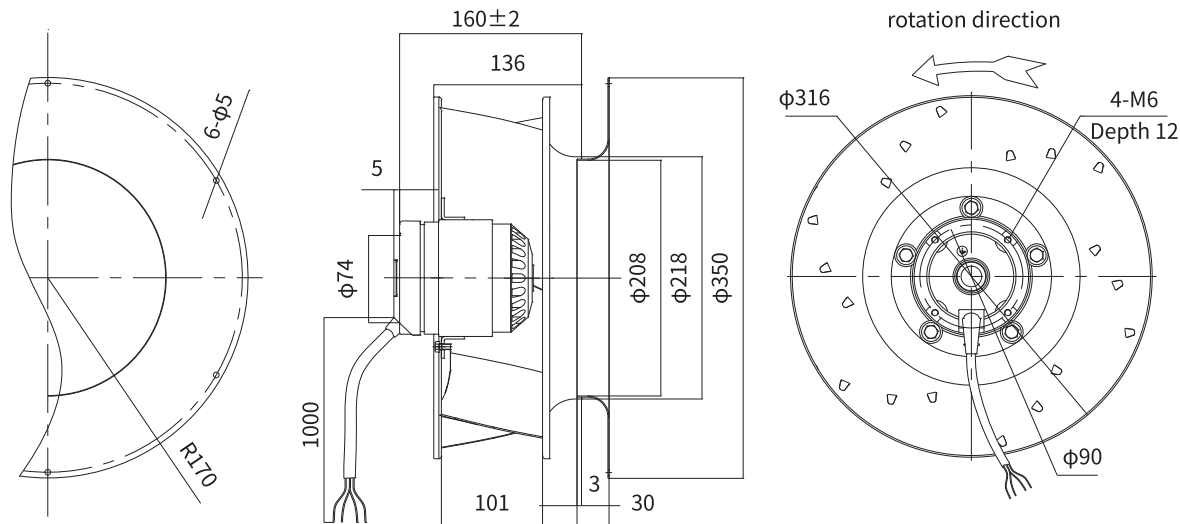

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	Approvals
YWF.B4S-315-136AB1A	115/120	60	1.60	180	1600	16	2000/1175	66	②	-30/+40	UL,RoHs
YWF.B4S-315-136AB10	220/230	50	0.60	135	1400	3.5	1765/1038	63	⑤	-30/+60	CCC,CE,RoHs
	220/230	60	0.80	180	1580	3.5	2000/1175	66	②	-30/+40	UL,CE,RoHs
YWF.B4T-315-136AB10	380/400	50	0.35	136	1430	/	1900/1117	64	①	-30/+60	CCC,CE,RoHs
	380/400	60	0.40	175	1550	/	2000/1175	66	②	-30/+40	UL,CE,RoHs
YWF.B6S-315-136AB10	220/230	50	0.38	75	940	3	1000/588	58	③	-30/+60	CCC,CE,RoHs
	220/230	60	0.42	85	1050	3	1100/647	60	④	-30/+60	UL,CE,RoHs
YWF.B6T-315-136AB10	380/400	50	0.20	70	900	/	1000/588	58	③	-30/+60	CCC,CE,RoHs
	380/400	60	0.24	80	1050	/	1100/647	60	④	-30/+60	UL,CE,RoHs

	电 压	频 率	电 流	输入功率	转 速	电 容	风 量	噪 音	曲 线	运行温度	认 证
Model No.	V	Hz	A	W	RPM	μF	m³/h/CFM	dB(A)	#	Min/Max(°C)	Approvals
YWF.B4S-355-144AB1A	115/120	60	2.00	240	1600	20	2600/1530	66	②	-30/+40	UL,RoHs
YWF.B4S-355-144AB10	220/230	50	0.75	165	1400	6	2450/1441	63	①	-30/+60	CCC,CE,RoHs
YWF.B4T-355-144AB10	380/400	50	0.45	178	1400	/	2450/1441	63	①	-30/+60	CCC,CE,RoHs
YWF.B6S-355-144AB10	220/230	50	0.46	100	930	4	1220/717	61	③	-30/+60	CCC,CE,RoHs
	220/230	60	0.50	130	1080	4	1320/776	62	④	-30/+60	UL,CE,RoHs
YWF.B6T-355-144AB10	380/400	50	0.32	100	950	/	1220/717	61	③	-30/+60	CCC,CE,RoHs
	380/400	60	0.35	135	1050	/	1320/776	62	④	-30/+60	UL,CE,RoHs